


30 x 60

*BLANCOS*  
*Porcelain collection*  
*2022*

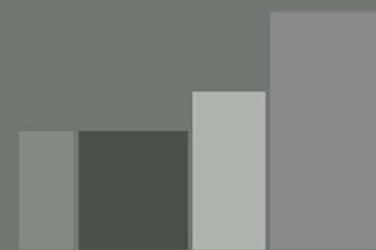

30x60 / 60x60 / 40x80 / 60x120  
available sizes

# 30 x 60

*ALL BLANCOS*  
*Porcelain collection 2022*




*other available sizes*  
*60x60 / 40x80 / 60x120*



1031 FUTURA CARRARA (13 FACE)

BREAKING STRENGTH (D) ISO 10645-4	WATER ABSORPTION ISO 10645-3	FROST RESISTANCE ISO 10645-12	CHEMICAL RESISTANCE ISO 10645-13	STAIN RESISTANCE ISO 10645-14	USE APPLICATION	USE APPLICATION
						
> 1300 N	< 0,5 %	RESISTANT	CLASS A, G1/A (RESISTANT)	CLASS 1 (RESISTANT)	WALL	FLOOR

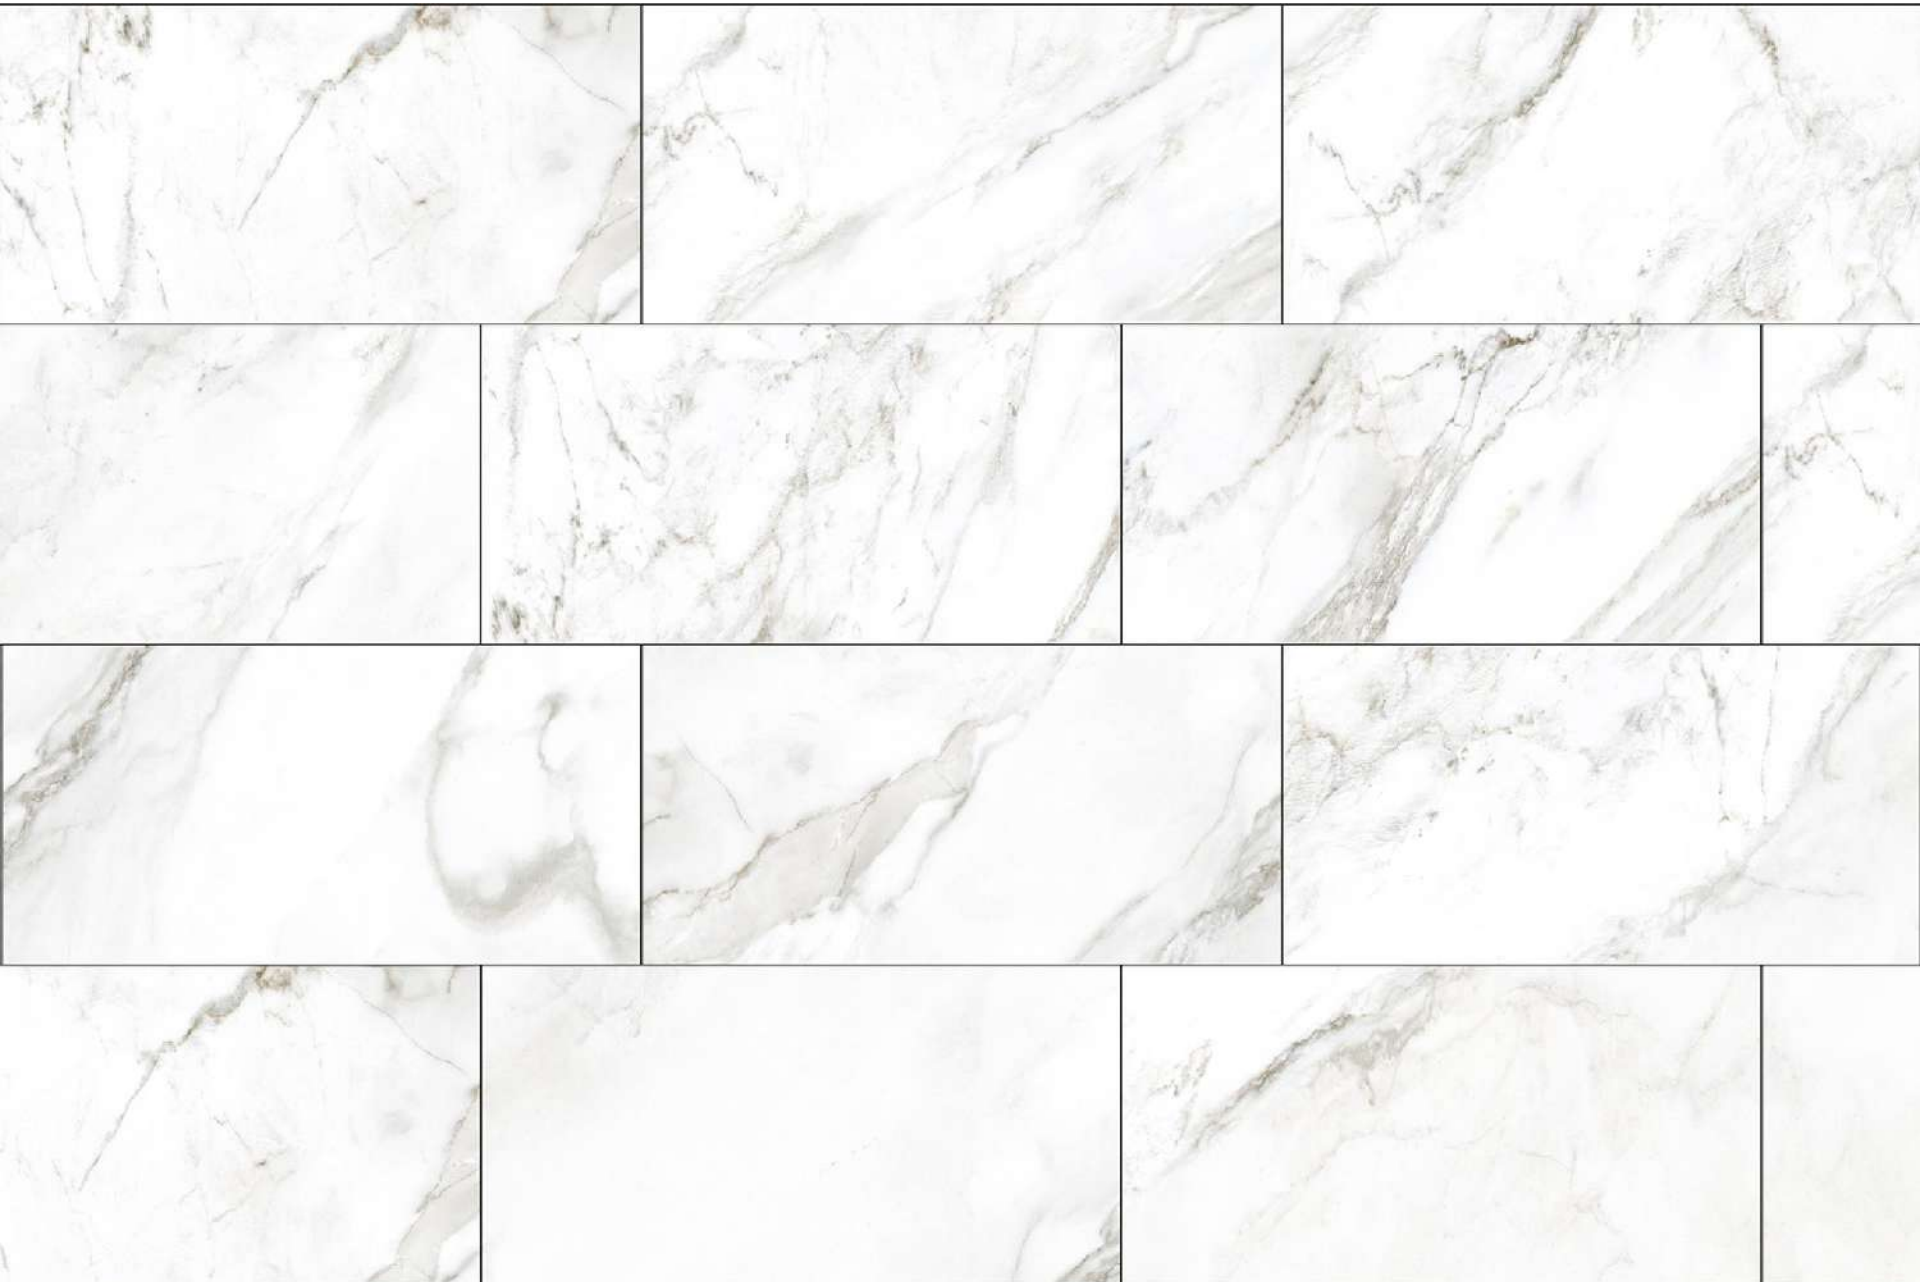

1031 FUTURA CARRARA (13 FACE)

POLISHED  
300 X 600 MM



2010 VERSACE BIANCO (9 FACE)

BREAKING STRENGTH (IS ISO 11845-1)	WATER ABSORPTION ISO 12548-3	FROST RESISTANCE ISO 10545-12	CHEMICAL RESISTANCE ISO 12845-13	STAIN RESISTANCE ISO 11845-14	USE APPLICATION	USE APPLICATION
						
> 1300 N	< 0.5%	RESISTANT	GLA. GLI (RESISTANT)	CLASSE (RESISTANT)	WALL	FLOOR








2013 MAKRANA WHITE (16 FACE)

BREAKING STRENGTH (D) ISO 10645-4	WATER ABSORPTION ISO 10645-3	FROST RESISTANCE ISO 10645-12	CHEMICAL RESISTANCE ISO 10645-13	STAIN RESISTANCE ISO 10645-14	USE APPLICATION	USE APPLICATION
> 1300 N	< 0.5 %	RESISTANT	CLASS A, B (RESISTANT)	CLASS C (RESISTANT)	WALL	FLOOR

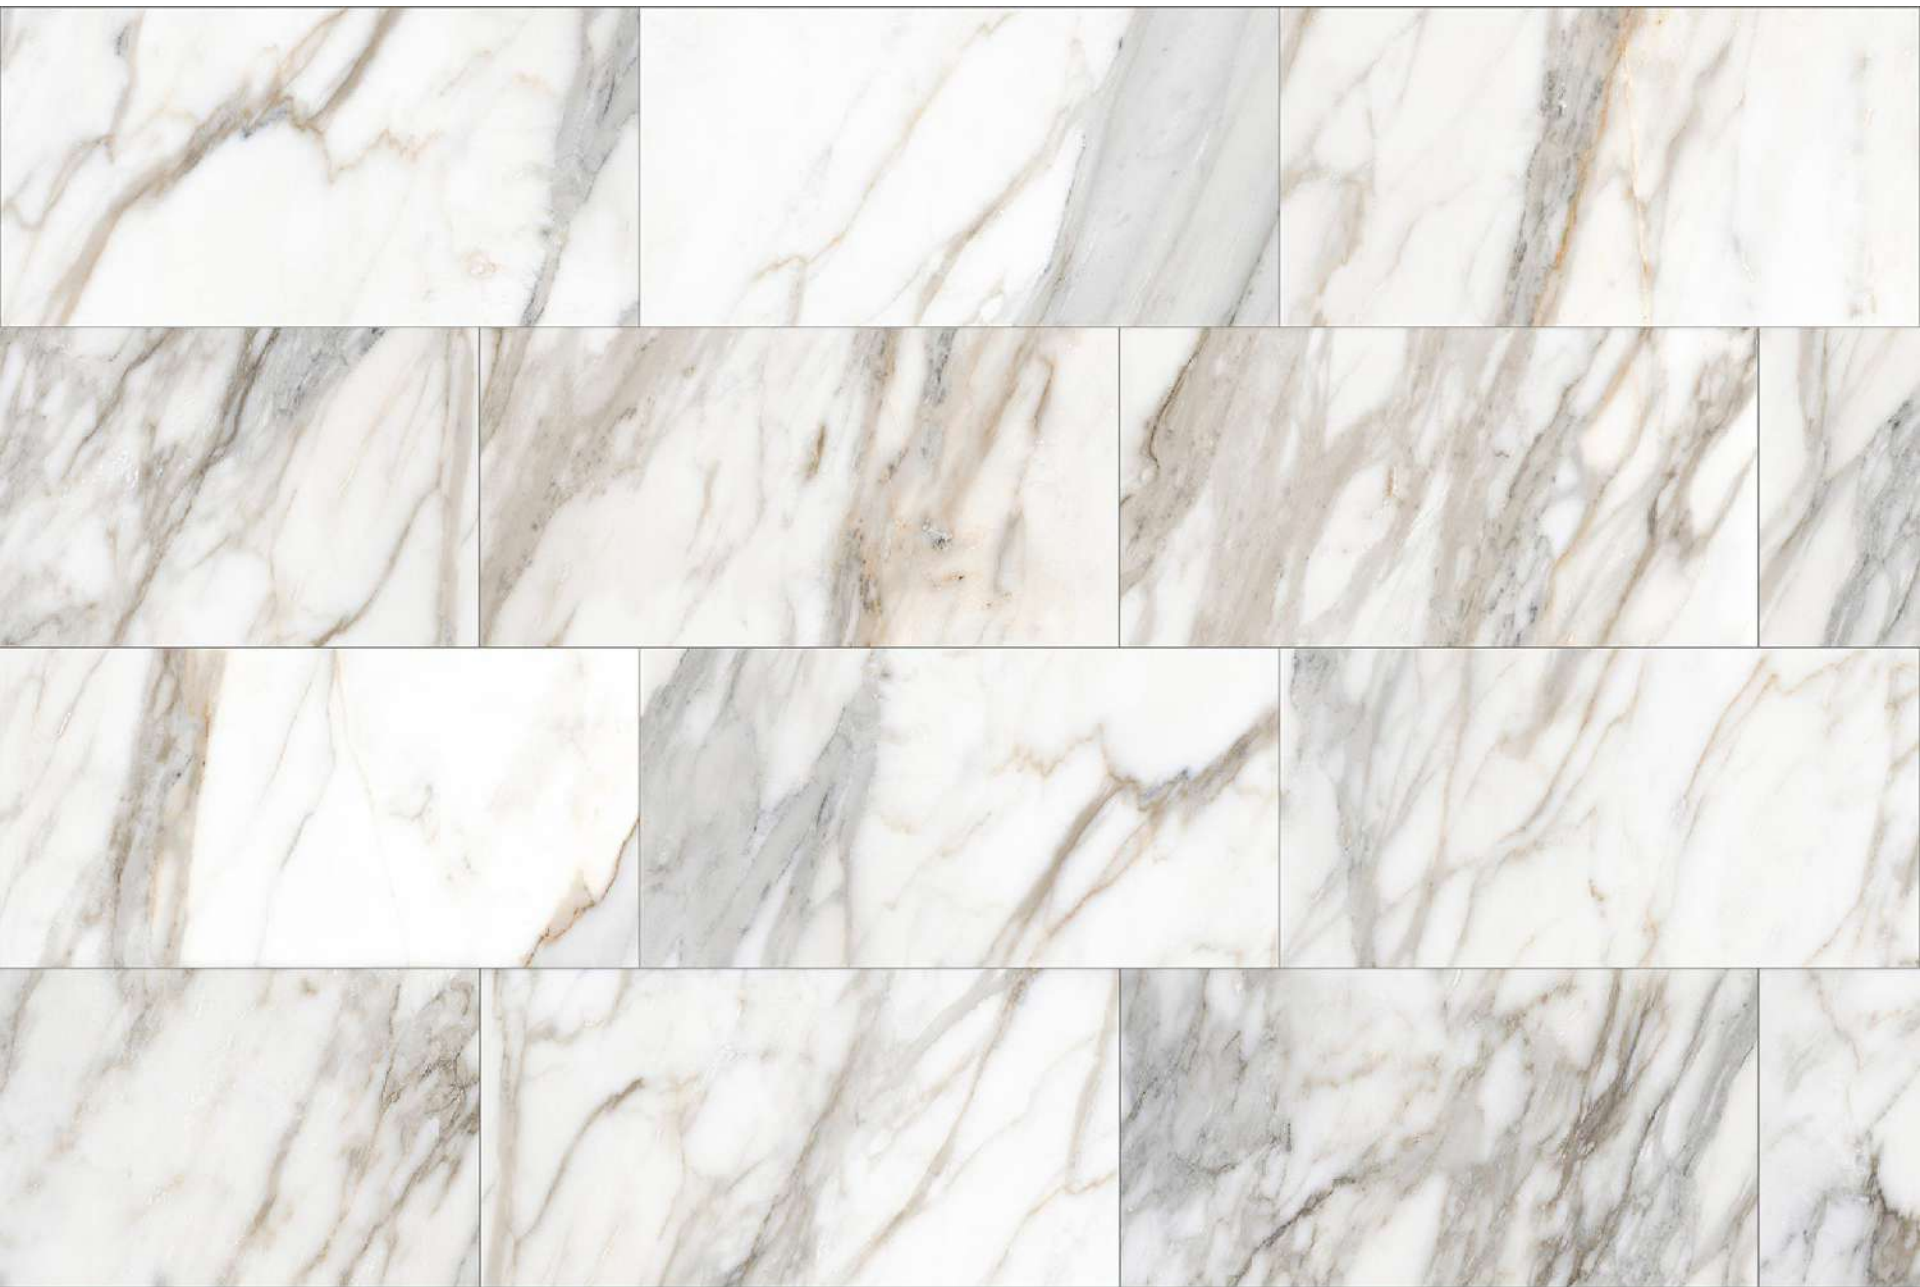


2013 MAKRANA WHITE (16 FACE)






2014 AFYON WHITE (10 FACE)


<small>BREAKING STRENGTH (D) ISO 10645-4</small>	<small>WATER ABSORPTION ISO 10648-3</small>	<small>FROST RESISTANCE ISO 10649-12</small>	<small>CHEMICAL RESISTANCE ISO 10649-13</small>	<small>STAIN RESISTANCE ISO 10649-14</small>	<small>USE APPLICATION</small>	<small>USE APPLICATION</small>
						
<small>&gt; 1300 N</small>	<small>&lt; 0,5 %</small>	<small>RESISTANT</small>	<small>G1, G16 (RESISTANT)</small>	<small>CLASSE (RESISTANT)</small>	<small>WALL</small>	<small>FLOOR</small>

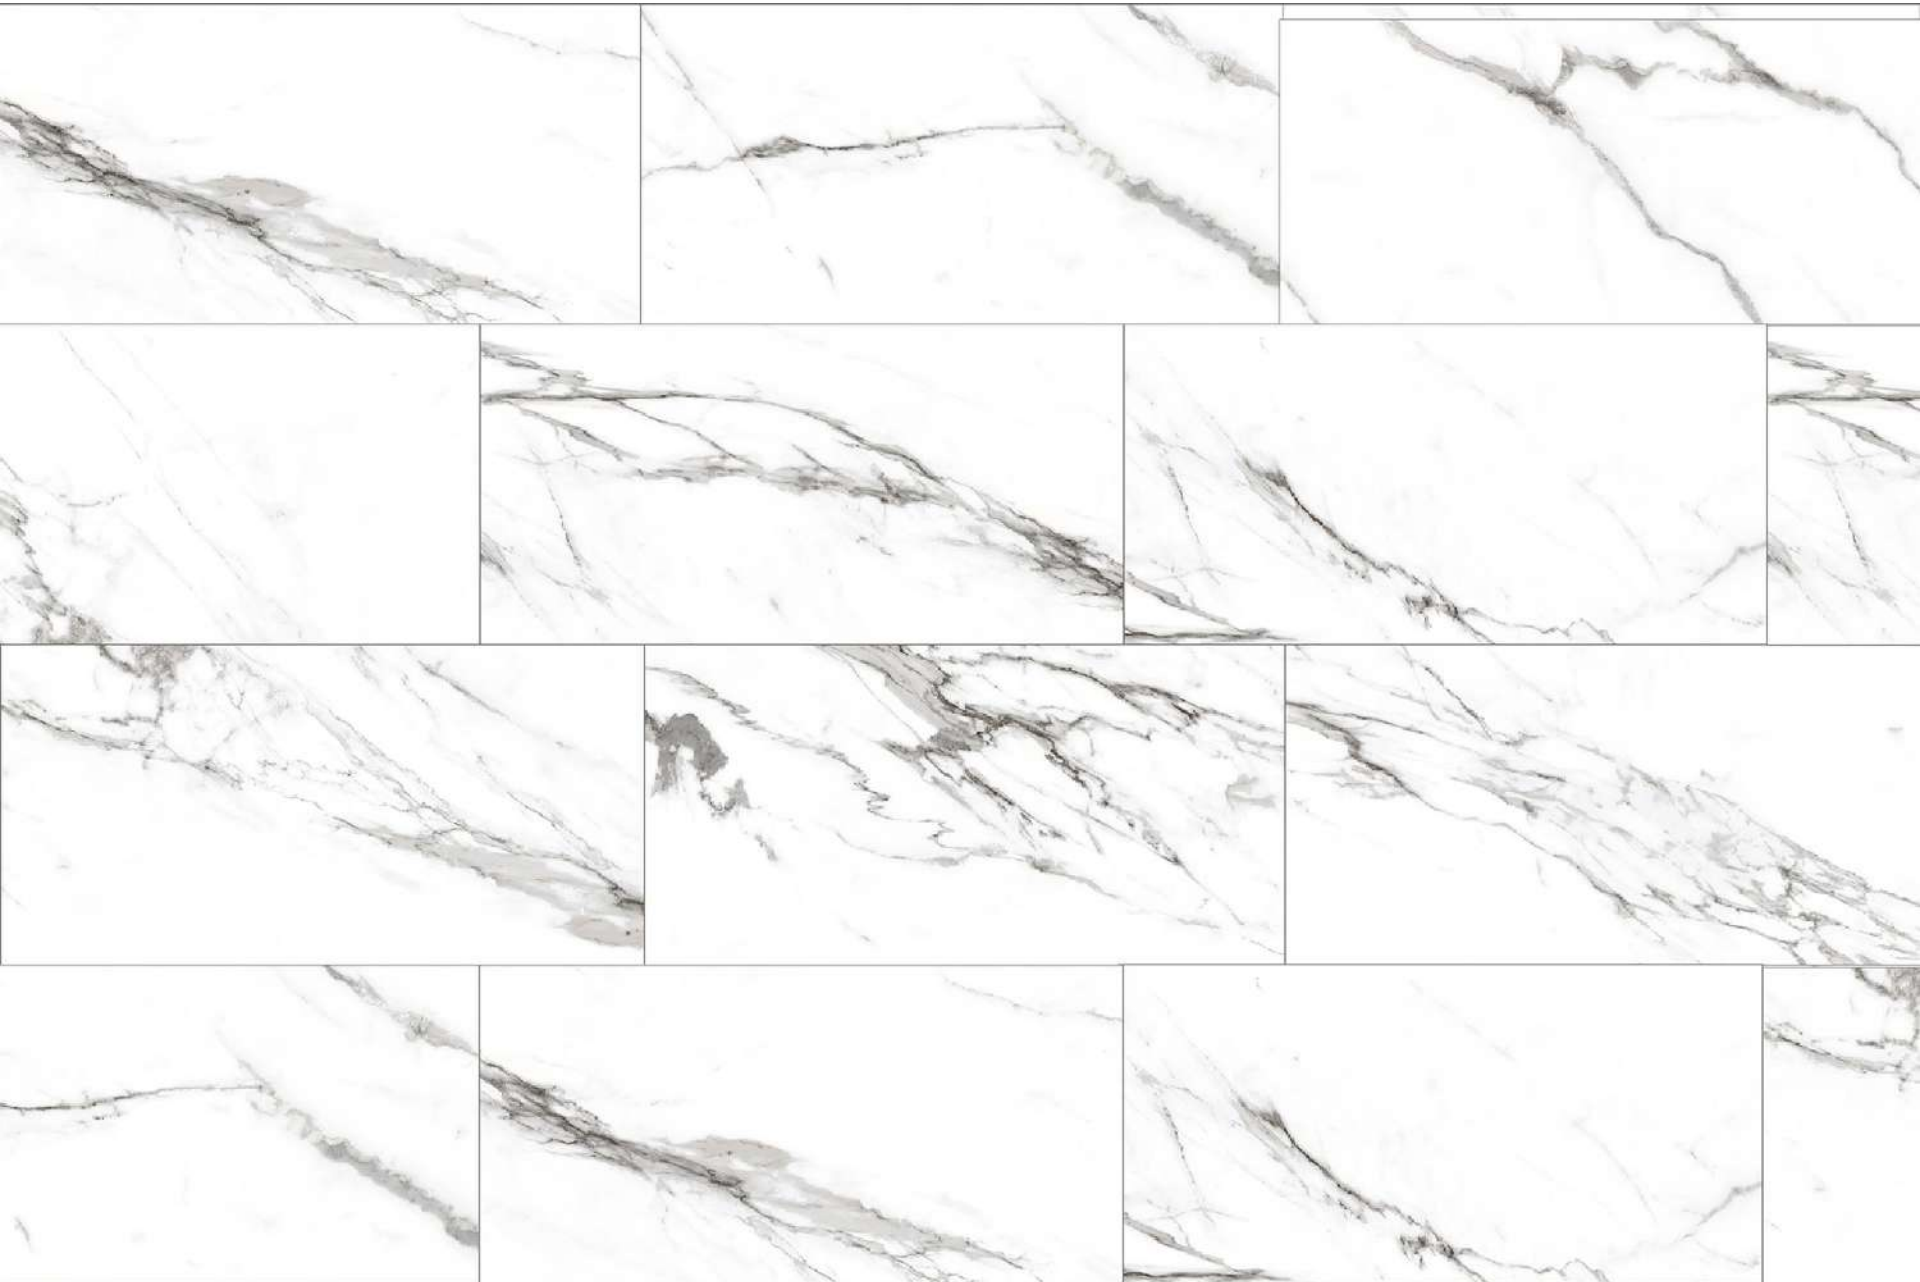

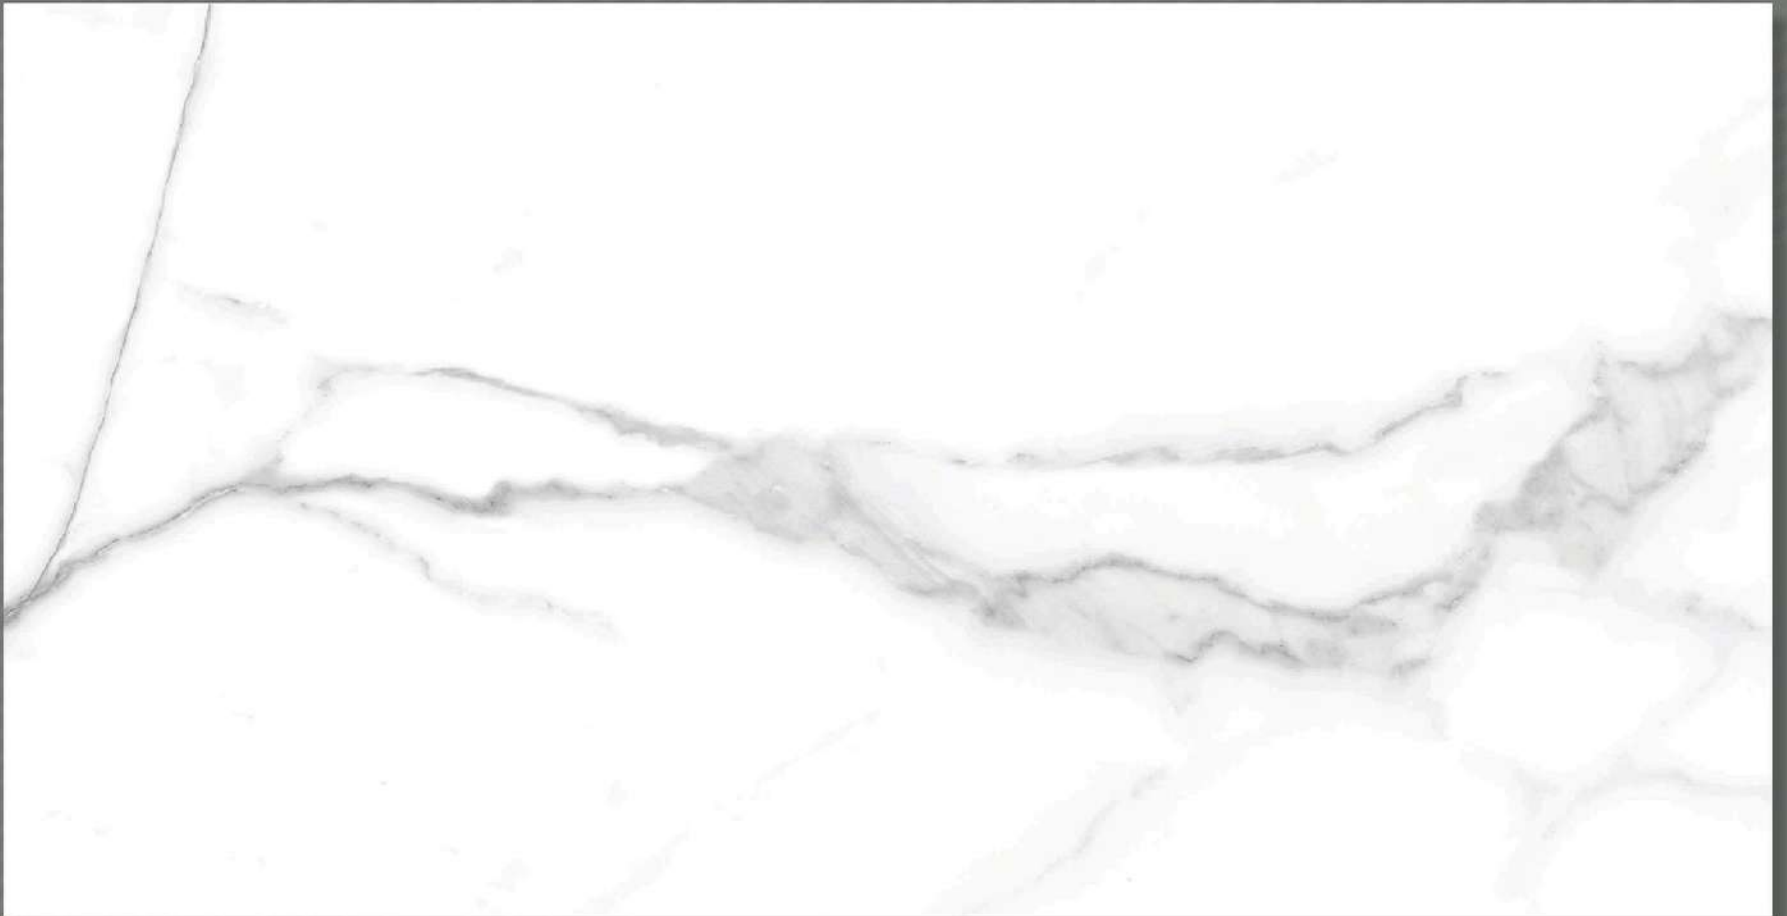

2015 COLORADO GREY (13 FACE)

BREAKING STRENGTH (D) ISO 10645-4	WATER ABSORPTION ISO 10645-3	FROST RESISTANCE ISO 10645-12	CHEMICAL RESISTANCE ISO 10645-13	STAIN RESISTANCE ISO 10645-14	USE APPLICATION	USE APPLICATION
> 1300 N	< 0,5 %	RESISTANT	G1, G18 (RESISTANT)	CLASS 3 (RESISTANT)	WALL	FLOOR

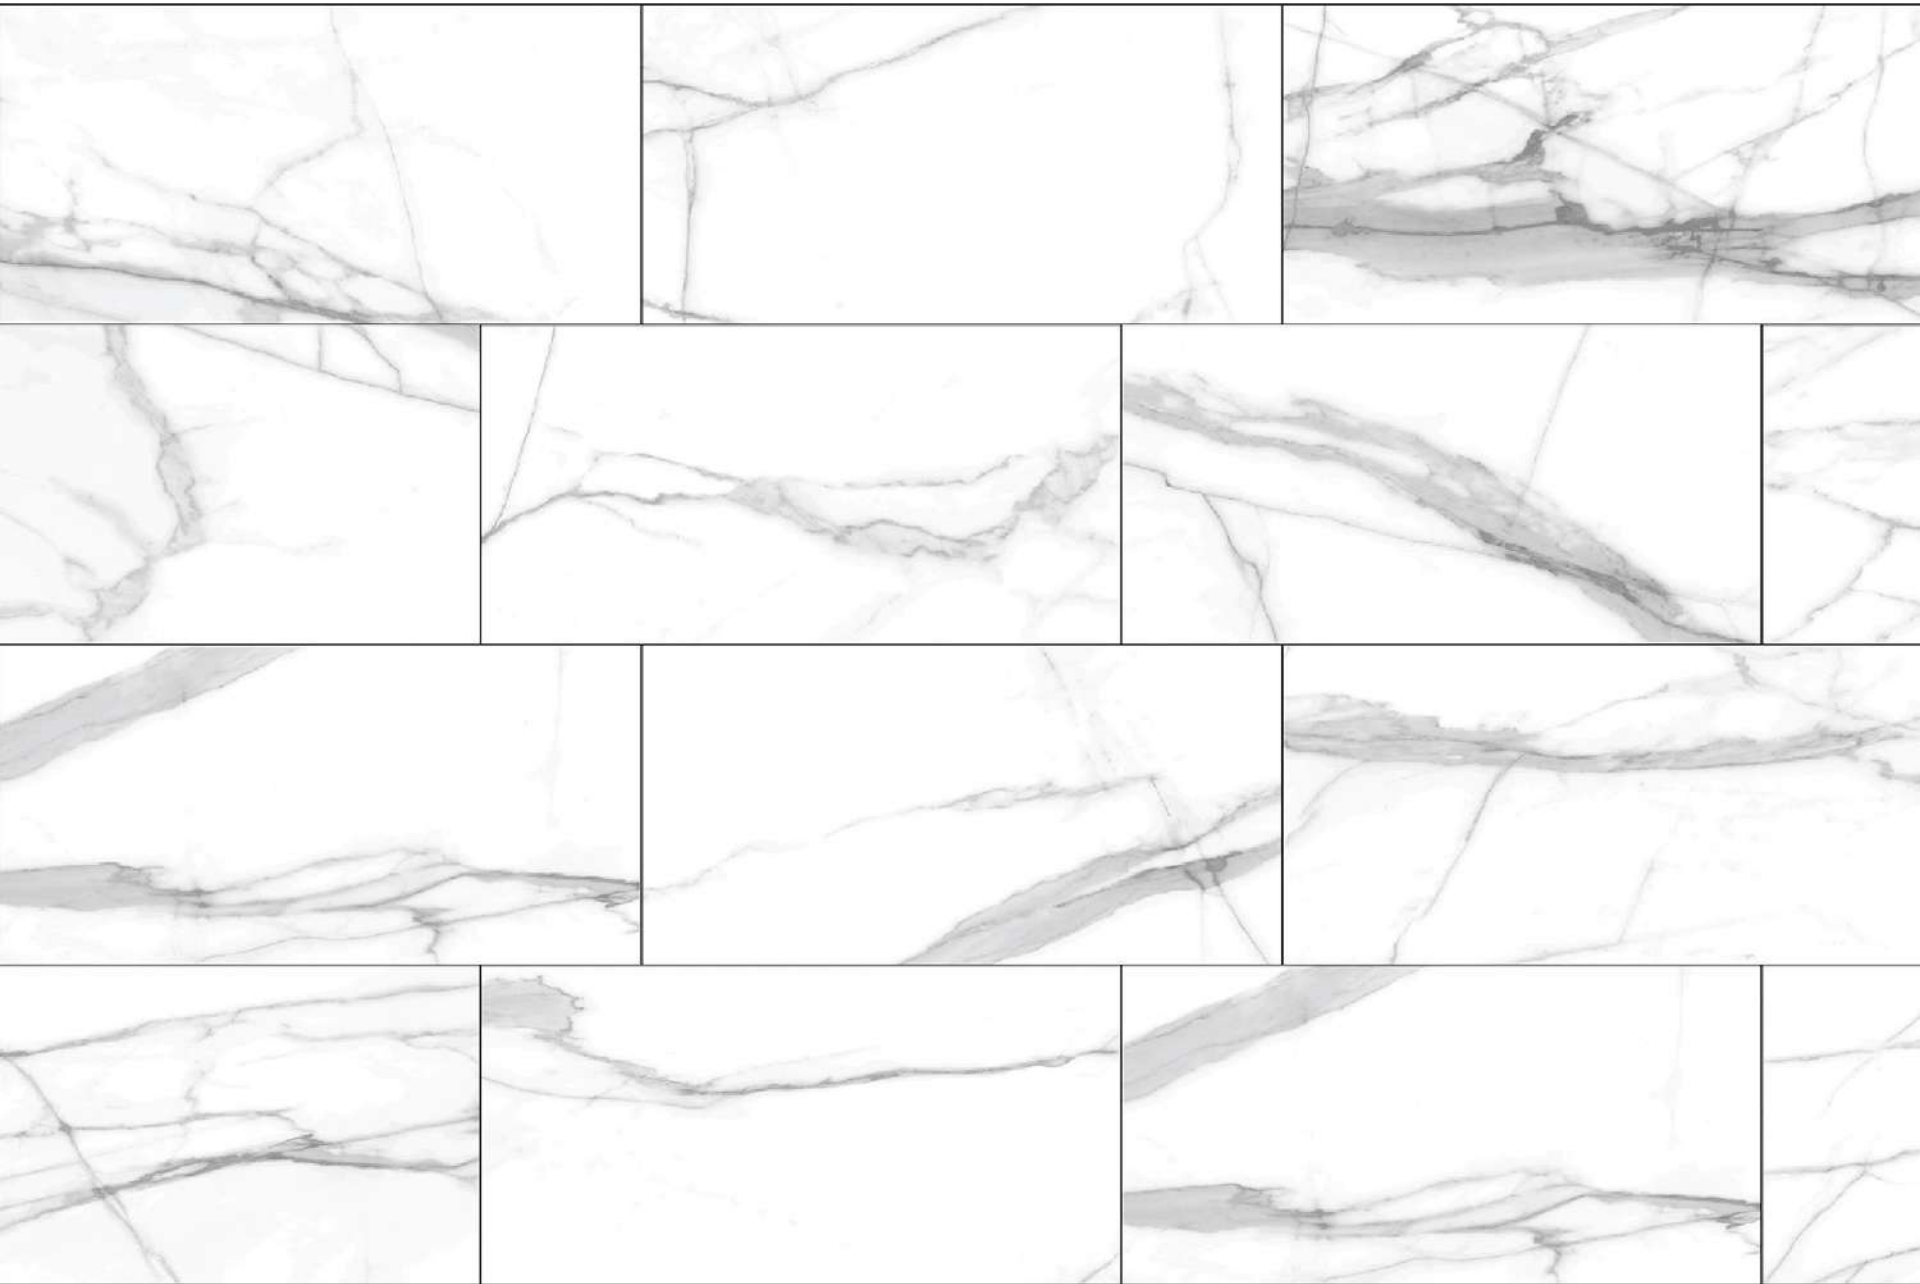



2016 COLORADO BROWN (13 FACE)

<small>BREAKING STRENGTH (D) ISO 10645-4</small>	<small>WATER ABSORPTION ISO 10648-3</small>	<small>FROST RESISTANCE ISO 10649-12</small>	<small>CHEMICAL RESISTANCE ISO 12848-13</small>	<small>STAIN RESISTANCE ISO 10545-14</small>	<small>USE APPLICATION</small>	<small>USE APPLICATION</small>
						
<small>&gt; 1300 N</small>	<small>&lt; 0,5 %</small>	<small>RESISTANT</small>	<small>G1, G18 (RESISTANT)</small>	<small>CLASS 1 (RESISTANT)</small>	<small>WALL</small>	<small>FLOOR</small>






2016 COLORADO BROWN (13 FACE)



2017 SATVARIO SUPRIMO (22 FACE)

BREAKING STRENGTH (D) ISO 10645-4	WATER ABSORPTION ISO 10645-3	FROST RESISTANCE ISO 10645-12	CHEMICAL RESISTANCE ISO 10645-13	STAIN RESISTANCE ISO 10645-14	USE APPLICATION	USE APPLICATION
						
> 1300 N	< 0,5 %	RESISTANT	G1, G16 (RESISTANT)	CLASS5 (RESISTANT)	WALL	FLOOR

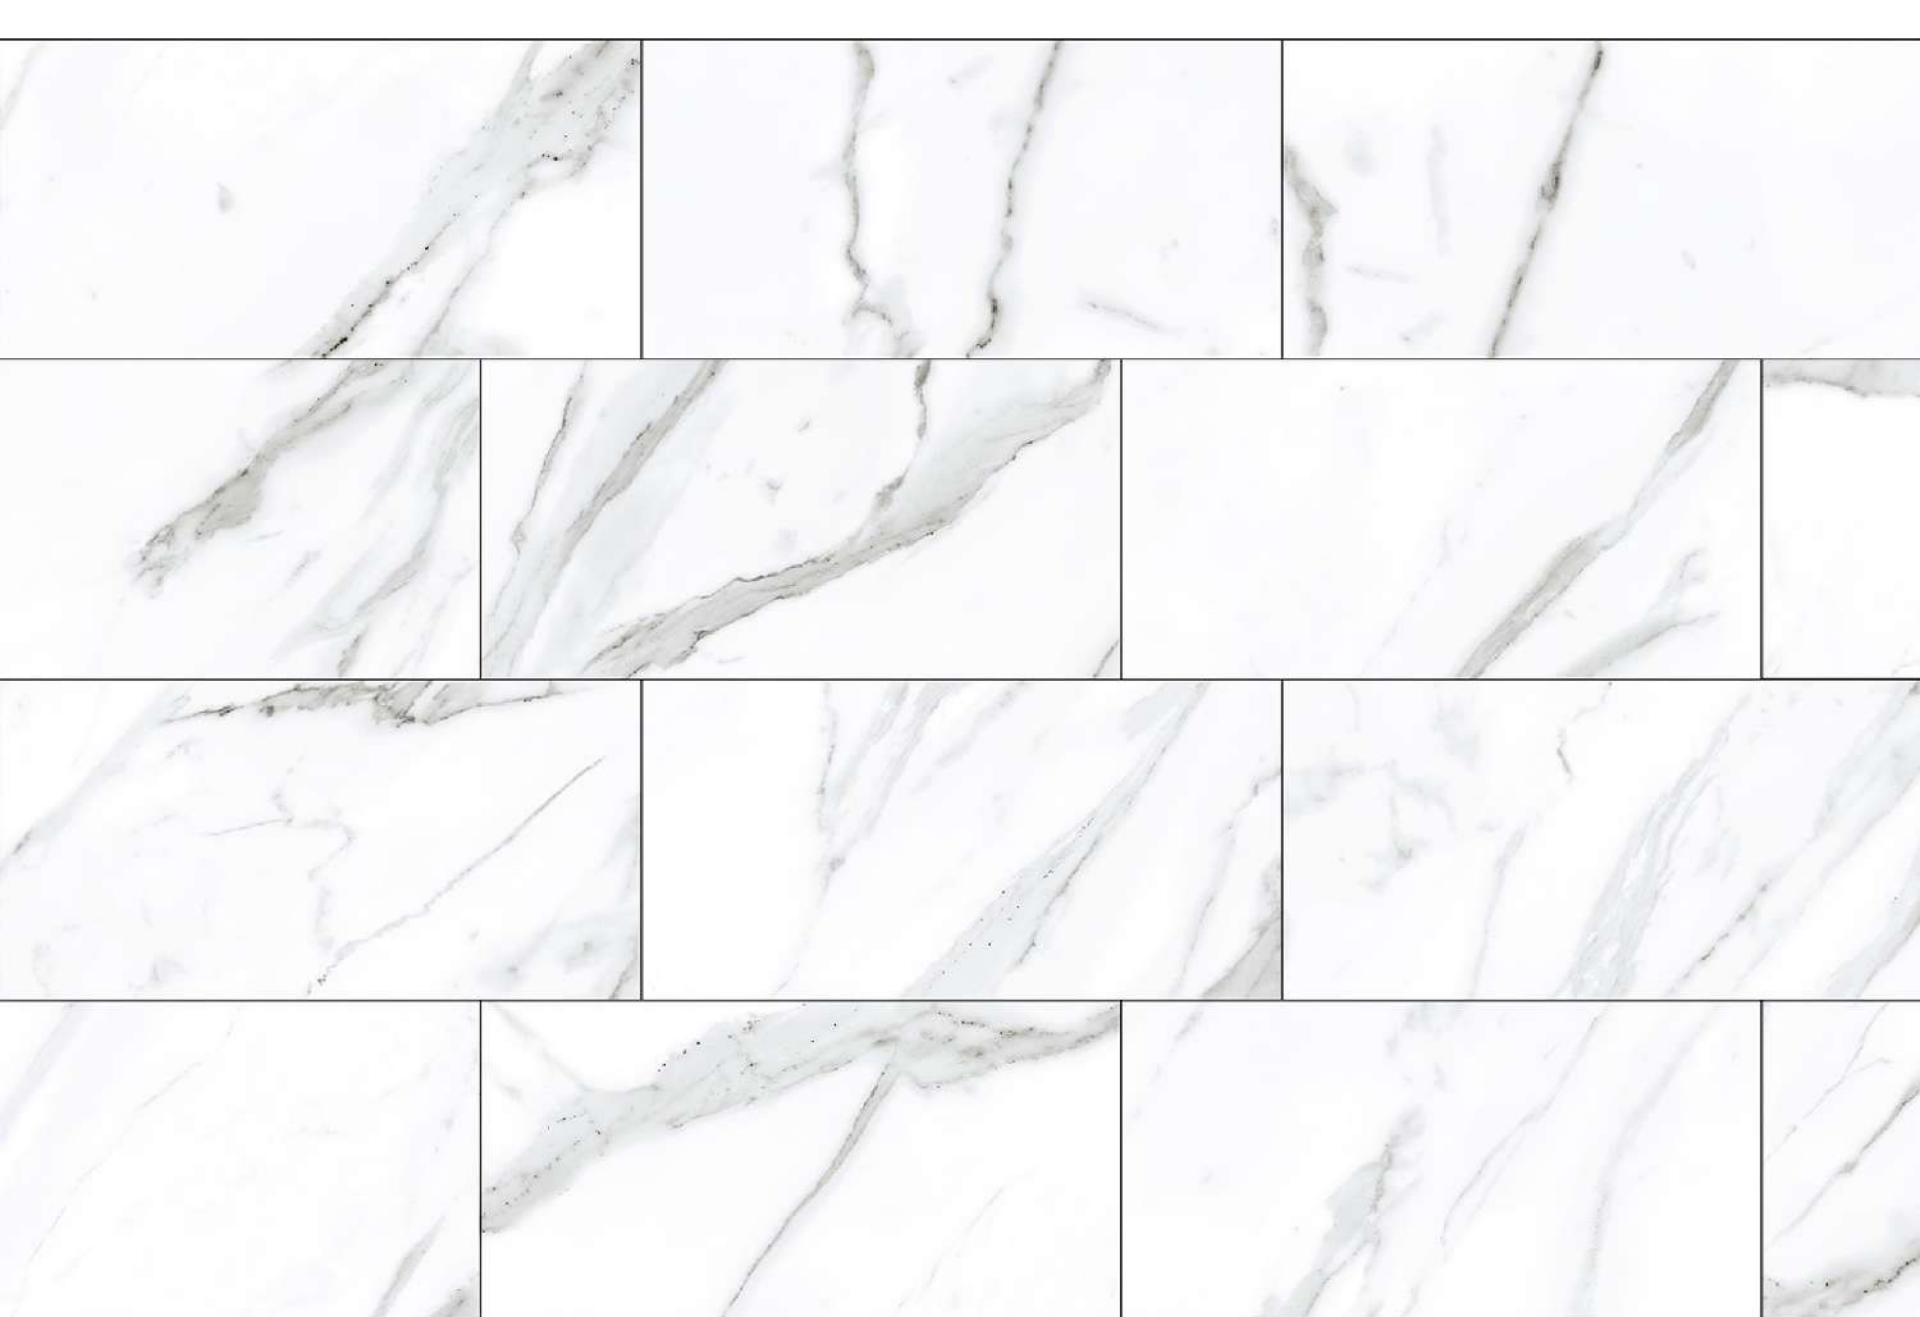



2022 ROMA STATUARIO (19 FACE)

BREAKING STRENGTH (D) ISO 10645-4	WATER ABSORPTION ISO 10645-3	FROST RESISTANCE ISO 10645-12	CHEMICAL RESISTANCE ISO 10645-13	STAIN RESISTANCE ISO 10645-14	USE APPLICATION	USE APPLICATION
> 1300 N	< 0,5 %	RESISTANT	GLA, G1A (RESISTANT)	CLASSE (RESISTANT)	WALL	FLOOR








4199 VELINA BIANCO (9 FACE)

<small>BREAKING STRENGTH (D) ISO 10645-4</small>	<small>WATER ABSORPTION ISO 10645-3</small>	<small>FROST RESISTANCE ISO 10645-12</small>	<small>CHEMICAL RESISTANCE ISO 10645-13</small>	<small>STAIN RESISTANCE ISO 10645-14</small>	<small>USE APPLICATION</small>	<small>USE APPLICATION</small>
						
<small>&gt; 1300 N</small>	<small>&lt; 0,5 %</small>	<small>RESISTANT</small>	<small>G1, G1A (RESISTANT)</small>	<small>CLASS 5 (RESISTANT)</small>	<small>WALL</small>	<small>FLOOR</small>



4199 VELINA BIANCO (9 FACE)

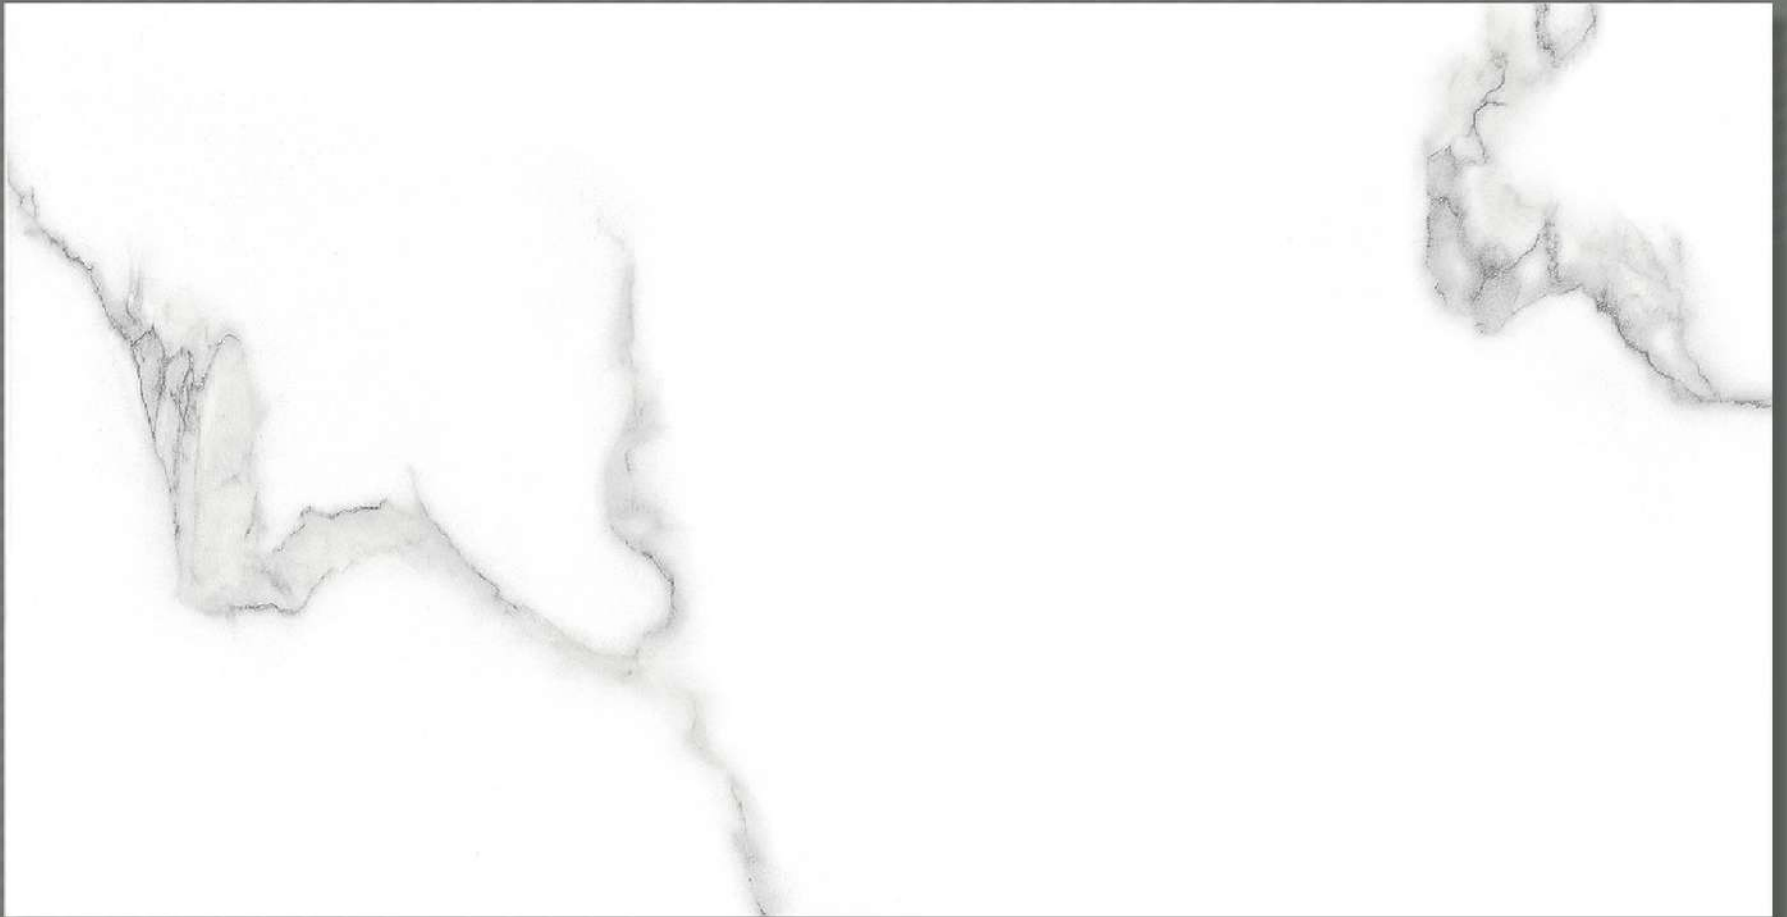

6241 BALI WHITE (8 FACE)

BREAKING STRENGTH (N) (ISO 10645-4)	WATER ABSORPTION (ISO 10645-3)	FROST RESISTANCE (ISO 10645-12)	CHEMICAL RESISTANCE (ISO 10645-13)	STAIN RESISTANCE (ISO 10645-14)	USE APPLICATION	USE APPLICATION
 > 1300 N	 < 0,5 %	 RESISTANT	 G1, G18 (RESISTANT)	 CLASS 5 (RESISTANT)	 WALL	 FLOOR




6241 BALI WHITE (8 FACE)



6247 RIBBON WHITE (8 FACE)

BREAKING STRENGTH (3) ISO 10645-4	WATER ABSORPTION ISO 10648-3	FROST RESISTANCE ISO 10649-12	CHEMICAL RESISTANCE ISO 12848-13	STAIN RESISTANCE ISO 10545-14	USE APPLICATION	USE APPLICATION
> 1300 N	< 0.5 %	RESISTANT	G1, G18 (RESISTANT)	CLASS 5 (RESISTANT)	WALL	FLOOR



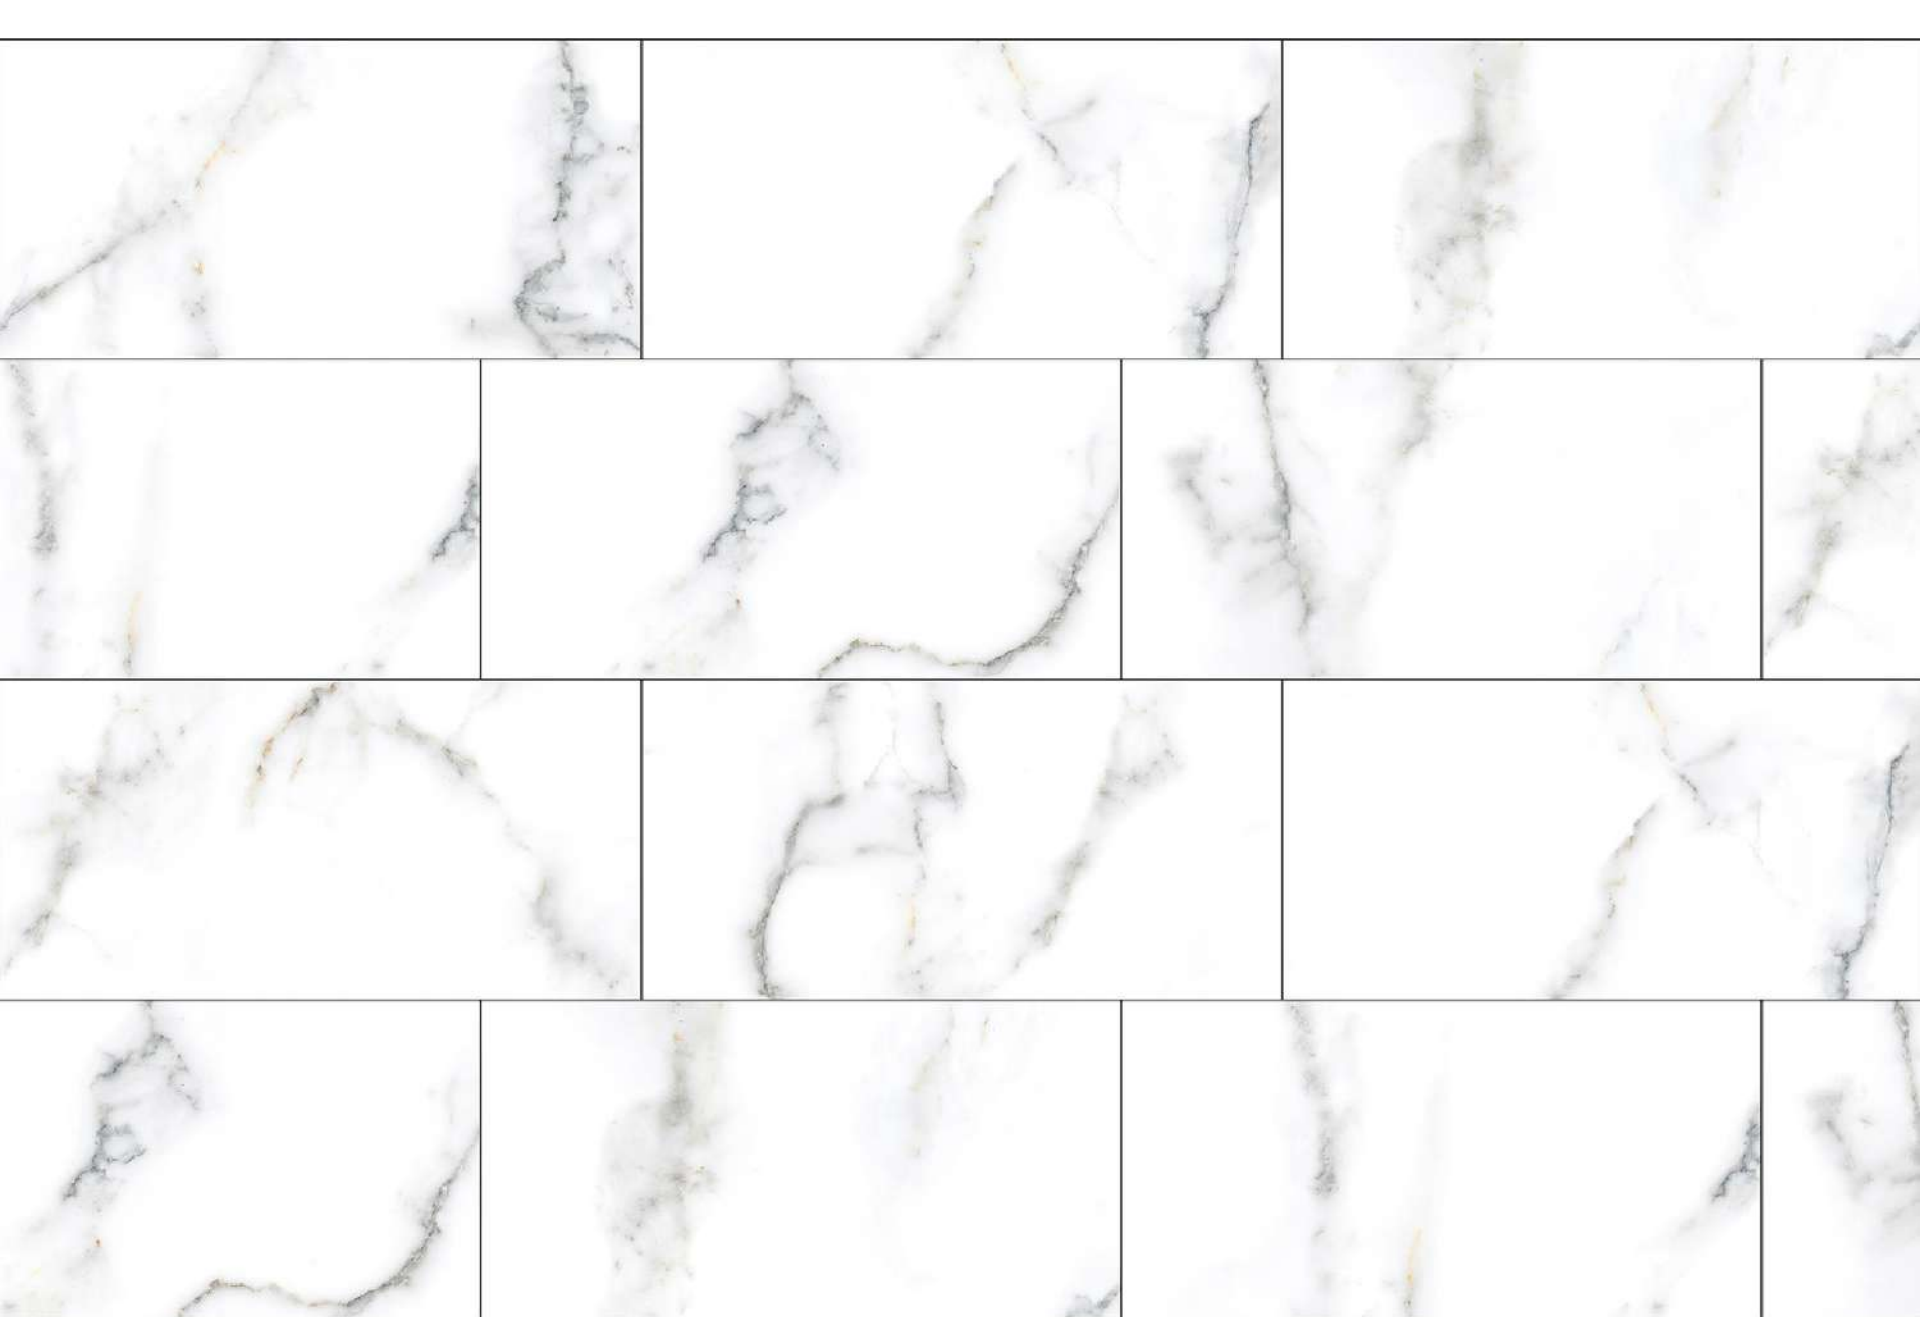


6247 RIBBON WHITE (8 FACE)



6265 STATUARIO WHITE (6 FACE)

BREAKING STRENGTH (D) ISO 10645-4	WATER ABSORPTION ISO 10648-3	FROST RESISTANCE ISO 10649-12	CHEMICAL RESISTANCE ISO 12848-13	STAIN RESISTANCE ISO 10543-34	USE APPLICATION	USE APPLICATION
						
> 1300 N	< 0,5 %	RESISTANT	G1, G18 (RESISTANT)	CLASS 5 (RESISTANT)	WALL	FLOOR

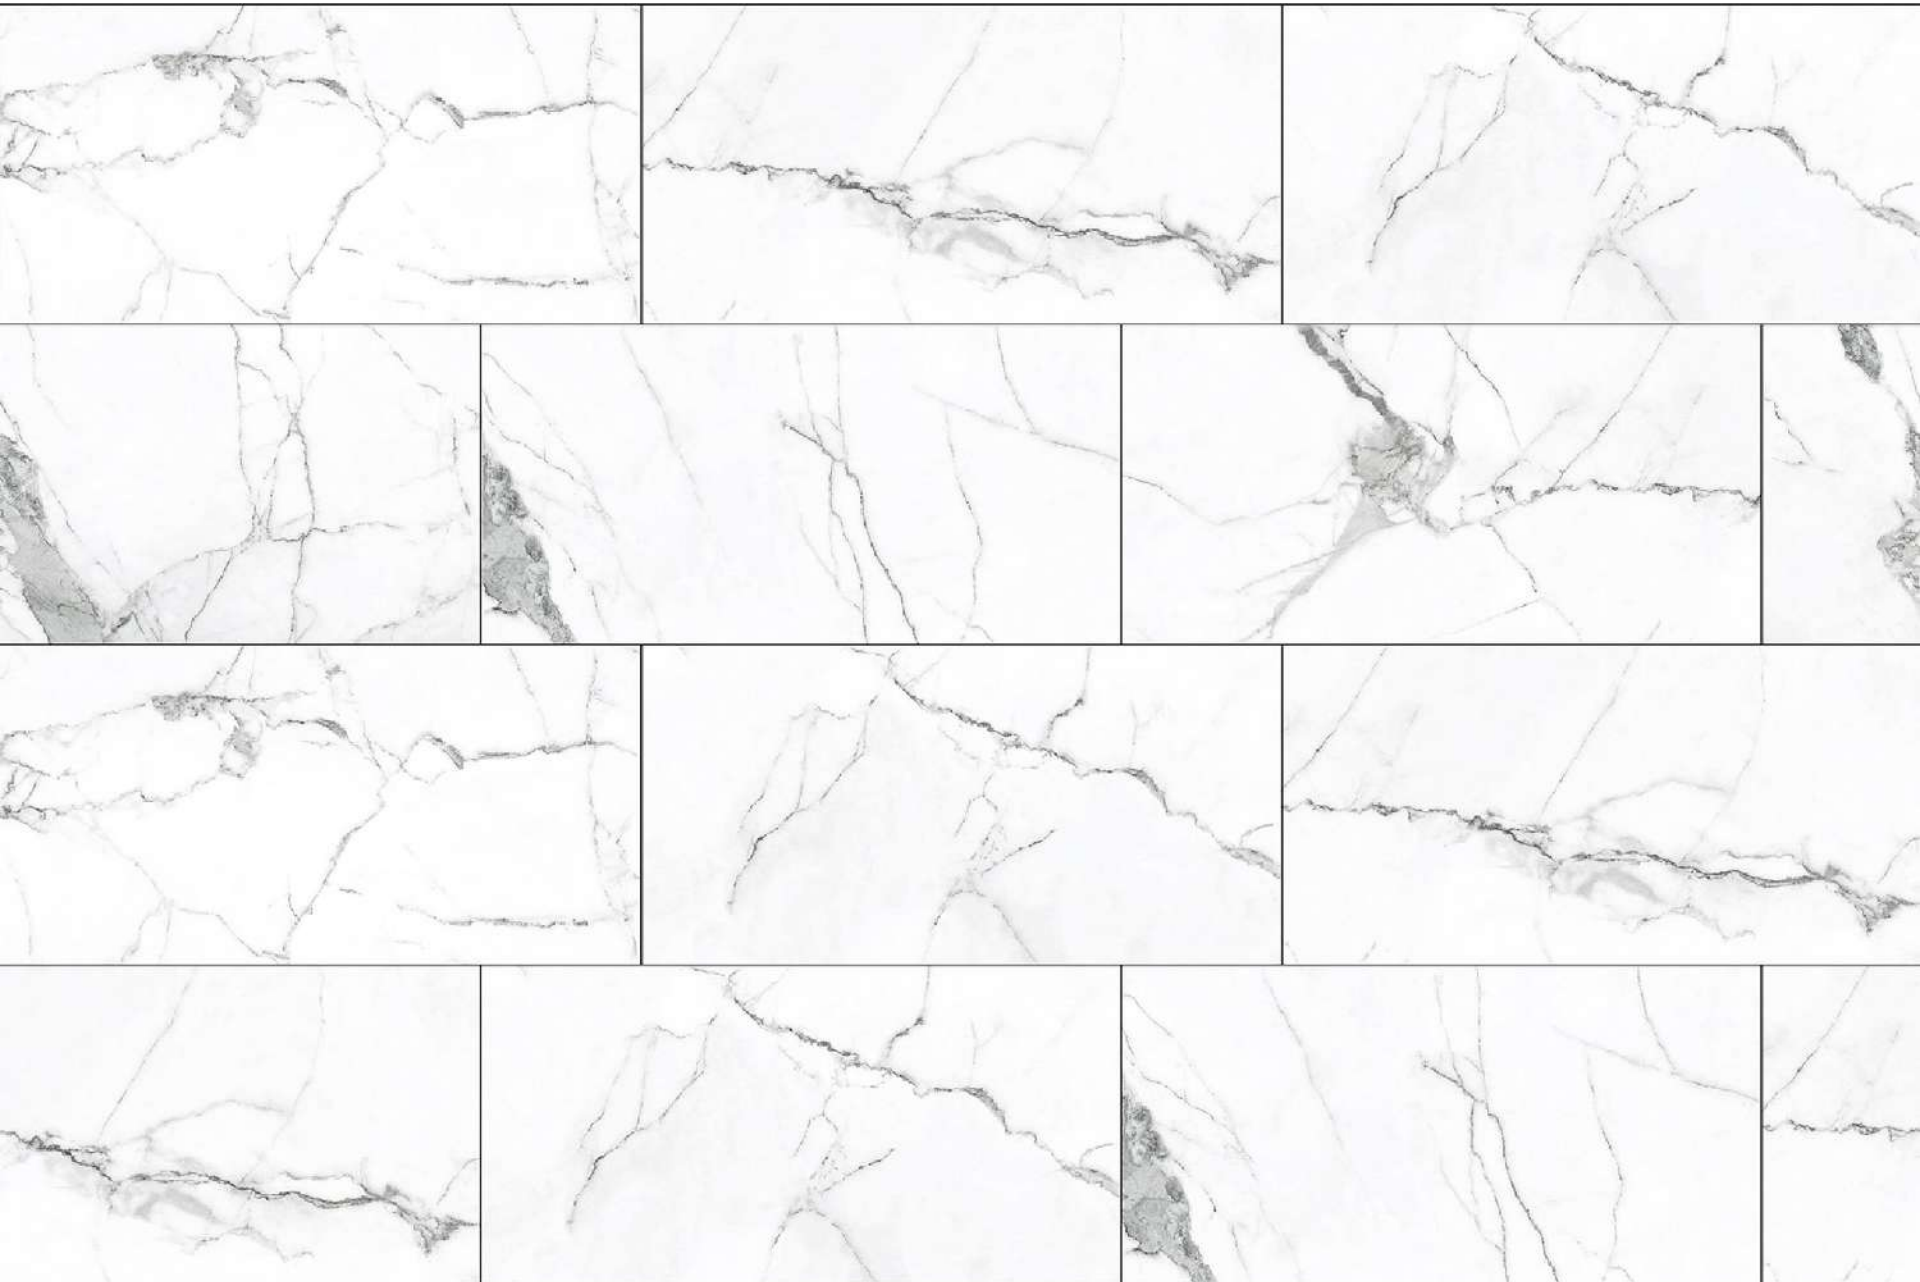

6265 STATUARIO WHITE (6 FACE)



6278 GRIGIO CARRARA (8 FACE)

<small>BREAKING STRENGTH (D) ISO 10645-4</small>	<small>WATER ABSORPTION ISO 10545-3</small>	<small>FROST RESISTANCE ISO 10545-12</small>	<small>CHEMICAL RESISTANCE ISO 10545-13</small>	<small>STAIN RESISTANCE ISO 10545-14</small>	<small>USE APPLICATION</small>	<small>USE APPLICATION</small>
						
<small>&gt; 1300 N</small>	<small>&lt; 0,5 %</small>	<small>RESISTANT</small>	<small>G1, G16 (RESISTANT)</small>	<small>CLASS 3 (RESISTANT)</small>	<small>WALL</small>	<small>FLOOR</small>



6278 GRIGIO CARRARA (8 FACE)





6290 ASPEN HONED (8 FACE)

BREAKING STRENGTH (D) ISO 10645-4	WATER ABSORPTION ISO 10645-3	FROST RESISTANCE ISO 10645-12	CHEMICAL RESISTANCE ISO 10645-13	STAIN RESISTANCE ISO 10645-14	USE APPLICATION	USE APPLICATION
						
> 1300 N	< 0,5 %	RESISTANT	CLASS 1 (RESISTANT)	CLASS 1 (RESISTANT)	WALL	FLOOR



6290 ASPEN HONED (8 FACE)



6299 CALACATTA (32 FACE)

BREAKING STRENGTH (D) ISO 10645-4	WATER ABSORPTION ISO 10545-3	FROST RESISTANCE ISO 10545-12	CHEMICAL RESISTANCE ISO 10545-13	STAIN RESISTANCE ISO 10545-14	USE APPLICATION	USE APPLICATION
						
> 1300 N	< 0,5 %	RESISTANT	G1, G1H (RESISTANT)	CLASSE (RESISTANT)	WALL	FLOOR





12001 Himalaya White (8 FACE)

<small>BREAKING STRENGTH (D) ISO 10645-4</small>	<small>WATER ABSORPTION ISO 10648-3</small>	<small>FROST RESISTANCE ISO 10849-12</small>	<small>CHEMICAL RESISTANCE ISO 12848-13</small>	<small>STAIN RESISTANCE ISO 10545-34</small>	<small>USE APPLICATION</small>	<small>USE APPLICATION</small>
						
<small>&gt; 1300 N</small>	<small>&lt; 0.5 %</small>	<small>RESISTANT</small>	<small>G1, G18 (RESISTANT)</small>	<small>CLASS 3 (RESISTANT)</small>	<small>WALL</small>	<small>FLOOR</small>



12001 HIMALAYA WHITE (16 FACE)





12149 Arbescato White (3 FACE)

 BREAKING STRENGTH (3) ISO 10645-4	 WATER ABSORPTION ISO 10545-3	 FROST RESISTANCE ISO 10545-12	 CHEMICAL RESISTANCE ISO 10545-13	 STAIN RESISTANCE ISO 10545-14	 USE APPLICATION WALL	 USE APPLICATION FLOOR
> 1300 N	< 0,5 %	RESISTANT	CLASS A, G1/A (RESISTANT)	CLASS B (RESISTANT)	WALL	FLOOR



12149 Arbescato White (8 FACE)



12156 Platinum Satvario (13 FACE)

<small>BREAKING STRENGTH (D) (ISO 10648-4)</small>	<small>WATER ABSORPTION (ISO 10545-3)</small>	<small>FROST RESISTANCE (ISO 10545-12)</small>	<small>CHEMICAL RESISTANCE (ISO 10545-13)</small>	<small>STAIN RESISTANCE (ISO 10545-14)</small>	<small>USE APPLICATION</small>	<small>USE APPLICATION</small>
						
> 1300 N	< 0,5 %	RESISTANT	GLA, G1A (RESISTANT)	CLASSE5 (RESISTANT)	WALL	FLOOR





12156 Platinum Satvario (13 FACE)



12193 Quartz Calacatta (4 FACE)

BREAKING STRENGTH (D) (ISO 10645-4)	WATER ABSORPTION (ISO 10545-3)	FROST RESISTANCE (ISO 10545-12)	CHEMICAL RESISTANCE (ISO 10545-13)	STAIN RESISTANCE (ISO 10545-14)	USE APPLICATION	USE APPLICATION
 > 1300 N	 < 0,5 %	 RESISTANT	 G1, G16 (RESISTANT)	 CLASS 3 (RESISTANT)	 WALL	 FLOOR




12193 Quartz Calacatta (4 FACE)





12194 ROSEDALE WHITE (10 FACE)

 BREAKING STRENGTH (D) ISO 10645-4  > 1300 N	 WATER ABSORPTION ISO 10648-3  < 0,5 %	 FROST RESISTANCE ISO 10649-12  RESISTANT	 CHEMICAL RESISTANCE ISO 10649-13  G1, G18 (RESISTANT)	 STAIN RESISTANCE ISO 10649-14  CLASS 5 (RESISTANT)	 USE APPLICATION  WALL	 USE APPLICATION  FLOOR
--	--	---	---	--	---	--

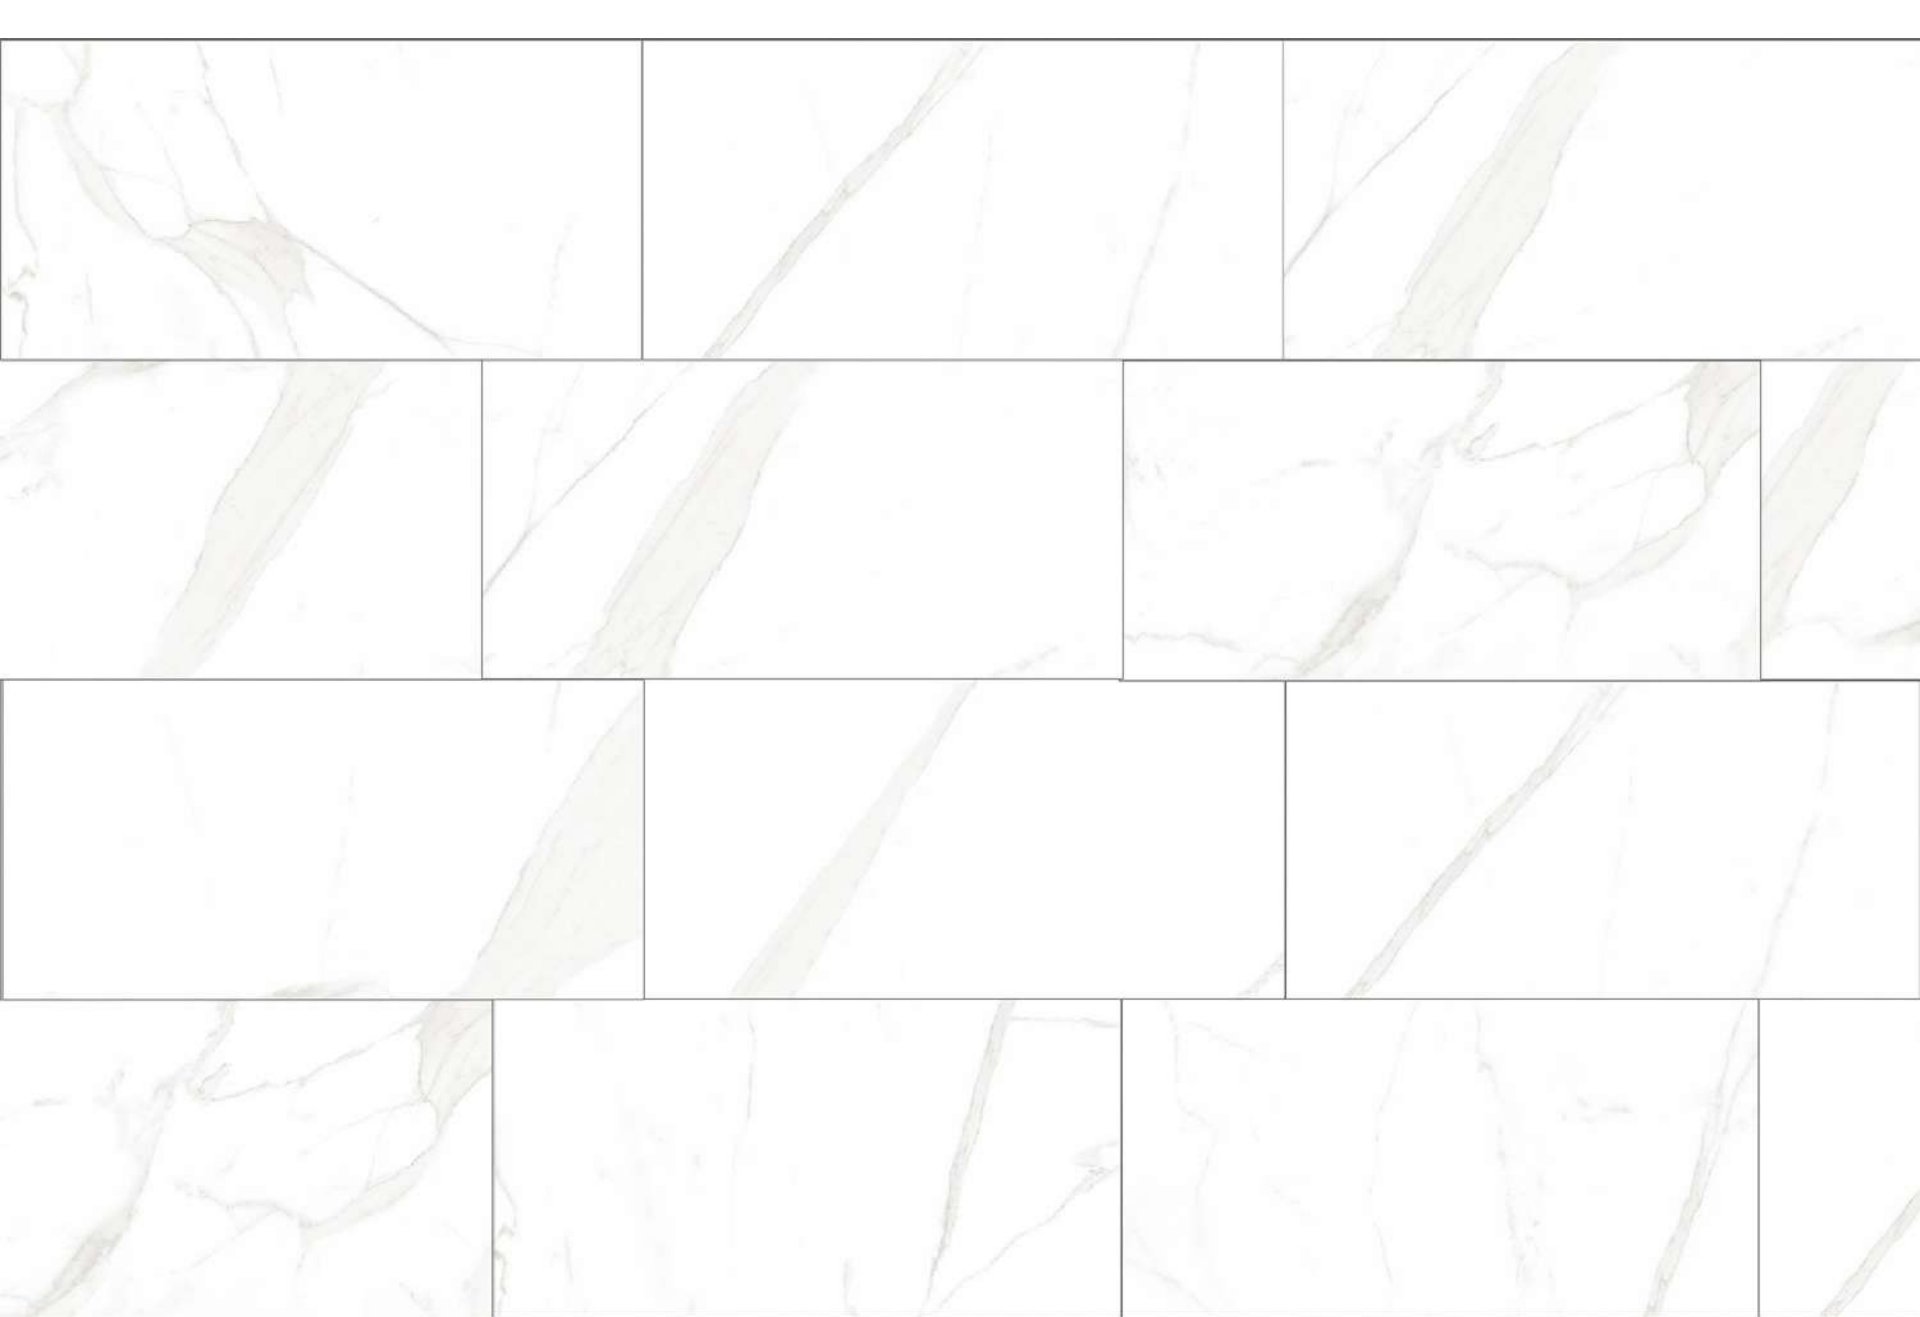


12194 ROSEDALE WHITE (10 FACE)



12196 Decton White (10 FACE)

BREAKING STRENGTH (3) (ISO 10645-4)	WATER ABSORPTION (ISO 10545-3)	FROST RESISTANCE (ISO 10545-12)	CHEMICAL RESISTANCE (ISO 10545-13)	STAIN RESISTANCE (ISO 10545-14)	USE APPLICATION	USE APPLICATION
 > 1300 N	 < 0,5 %	 RESISTANT	 G1, G18 (RESISTANT)	 CLASS 5 (RESISTANT)	 WALL	 FLOOR

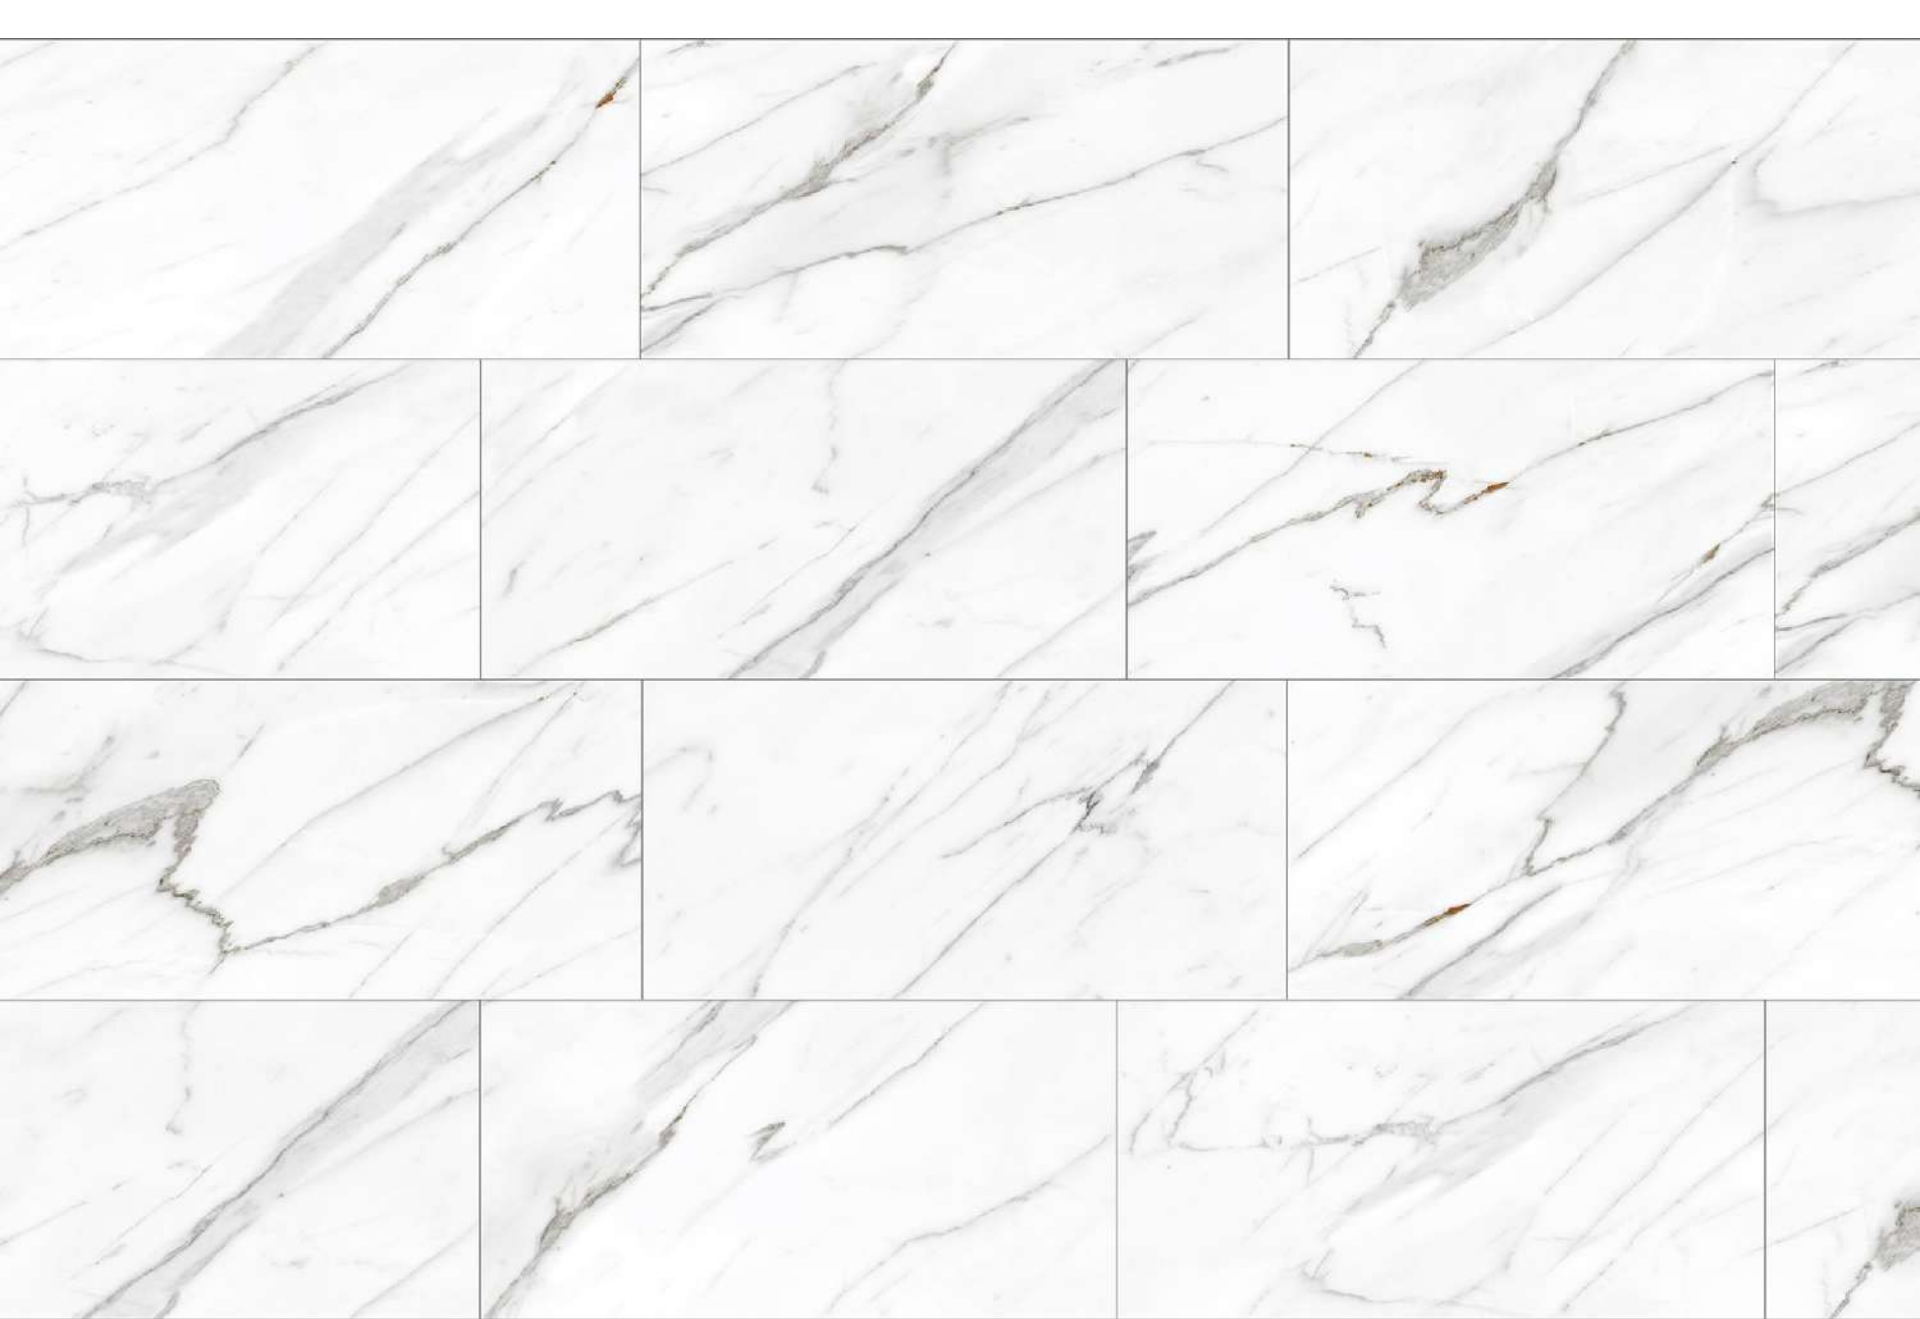


12196 Decton White (10 FACE)



12197 SPARKLING WHITE (10 FACE)

 BREAKING STRENGTH (N) ISO 10645-4  A	 WATER ABSORPTION ISO 10645-3  A	 FROST RESISTANCE ISO 10645-12  RESISTANT	 CHEMICAL RESISTANCE ISO 10645-13  G1A, G1B (RESISTANT)	 STAIN RESISTANCE ISO 10645-14  CLASSE 3 (RESISTANT)	 USE APPLICATION  WALL	 USE APPLICATION  FLOOR
---	--	---	--	---	---	--

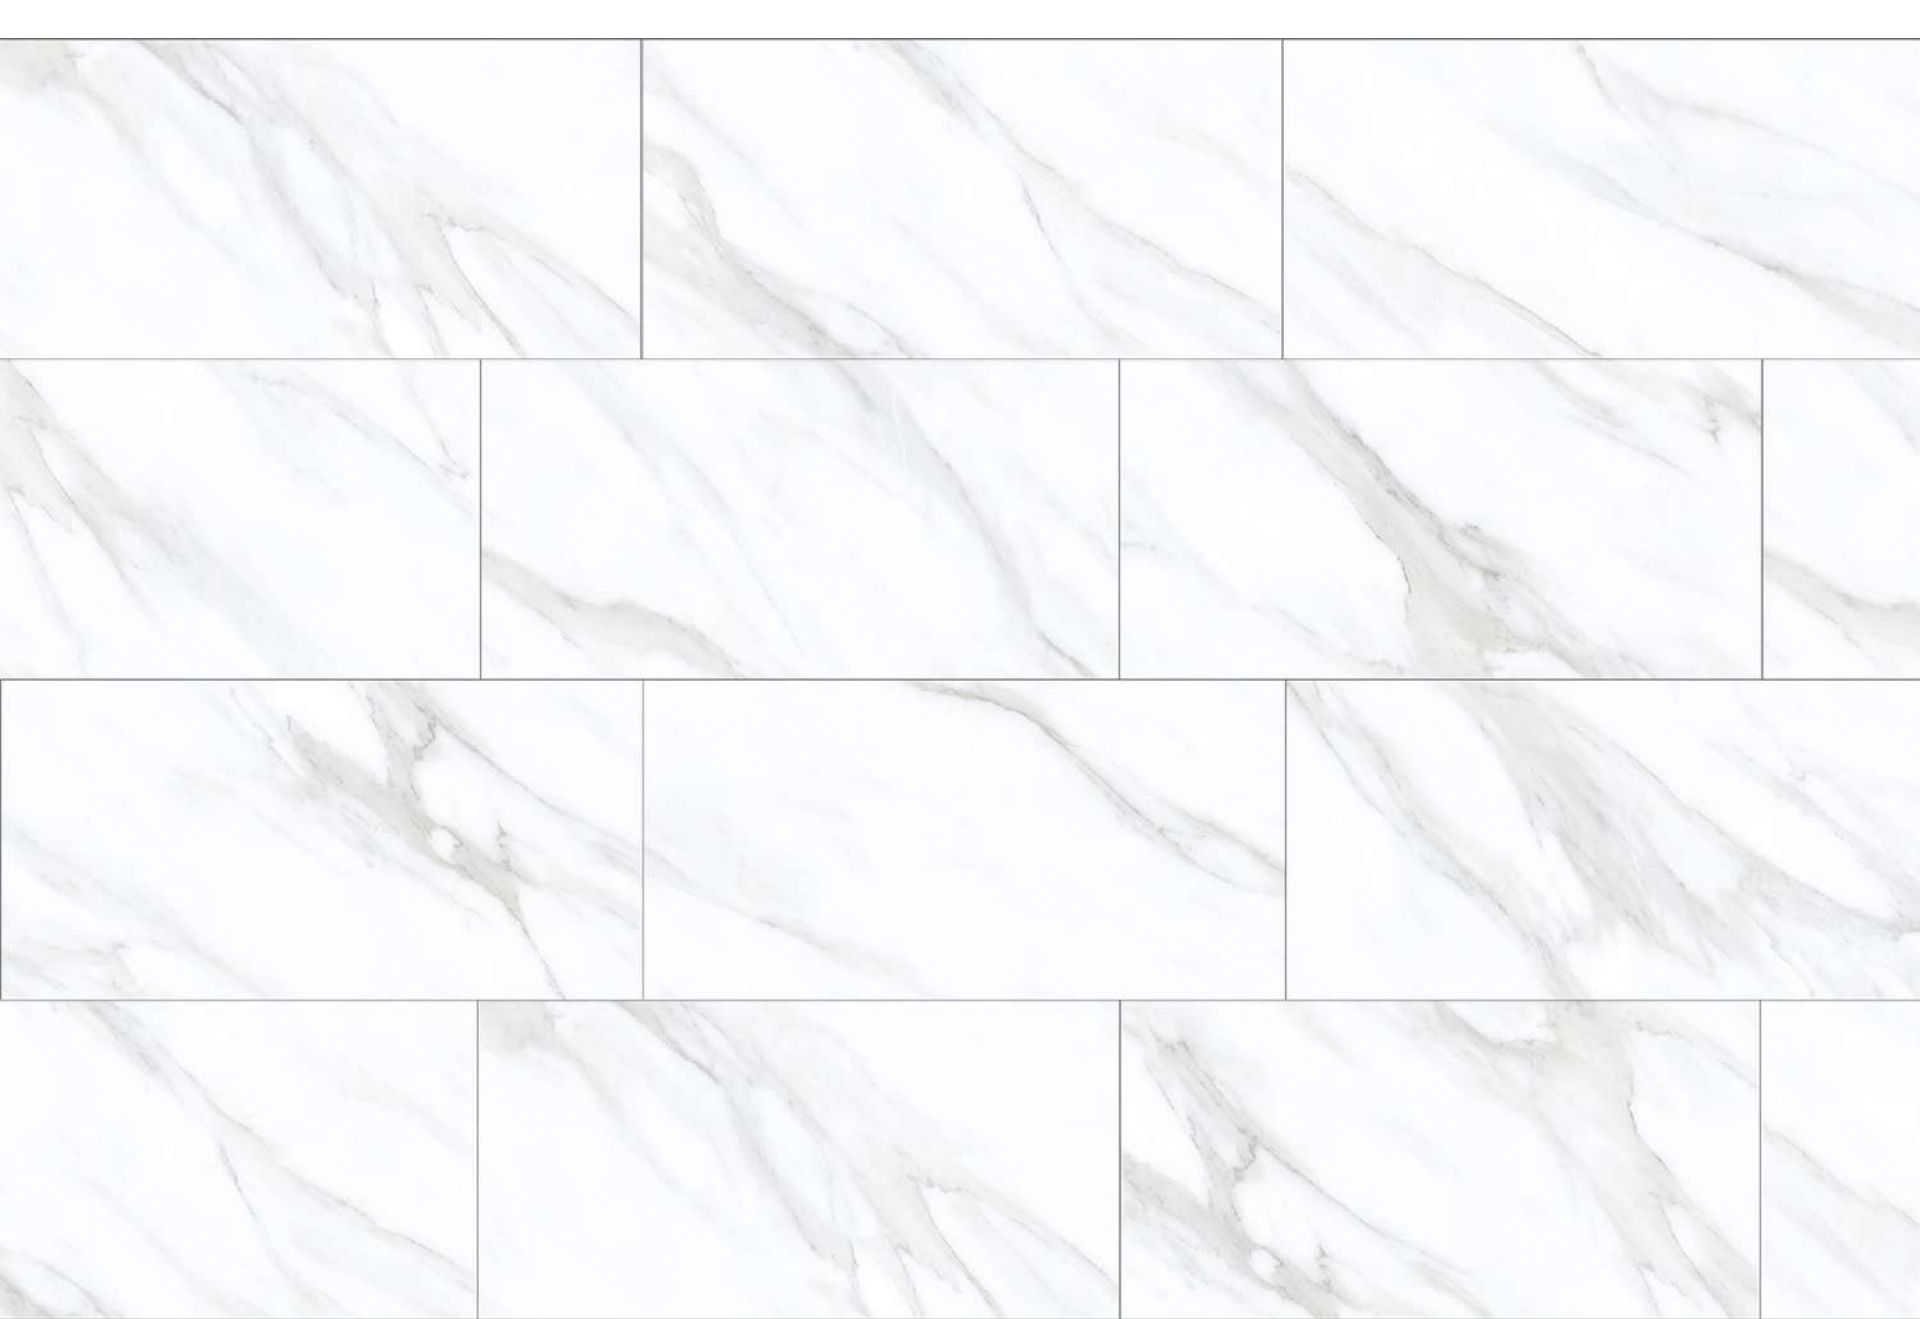

12197 SPARKLING WHITE (10 FACE)





12201 Bardiglio Classico (10 FACE)

BREAKING STRENGTH (D) ISO 10645-4	WATER ABSORPTION ISO 10645-3	FROST RESISTANCE ISO 10645-12	CHEMICAL RESISTANCE ISO 10645-13	STAIN RESISTANCE ISO 10645-14	USE APPLICATION	USE APPLICATION
> 1300 N	< 0,5 %	RESISTANT	GLA, G1H (RESISTANT)	CLASSE 3 (RESISTANT)	WALL	FLOOR




12201 Bardiglio Classico (10 FACE)



12217 GLACIER CARARA (13 FACE)

BREAKING STRENGTH (D) ISO 10645-4	WATER ABSORPTION ISO 10545-3	FROST RESISTANCE ISO 10545-12	CHEMICAL RESISTANCE ISO 10545-13	STAIN RESISTANCE ISO 10545-14	USE APPLICATION	USE APPLICATION
						
> 130E N	< 0,5 %	RESISTANT	GLA. GHA (RESISTANT)	CLASSE (RESISTANT)	WALL	FLOOR



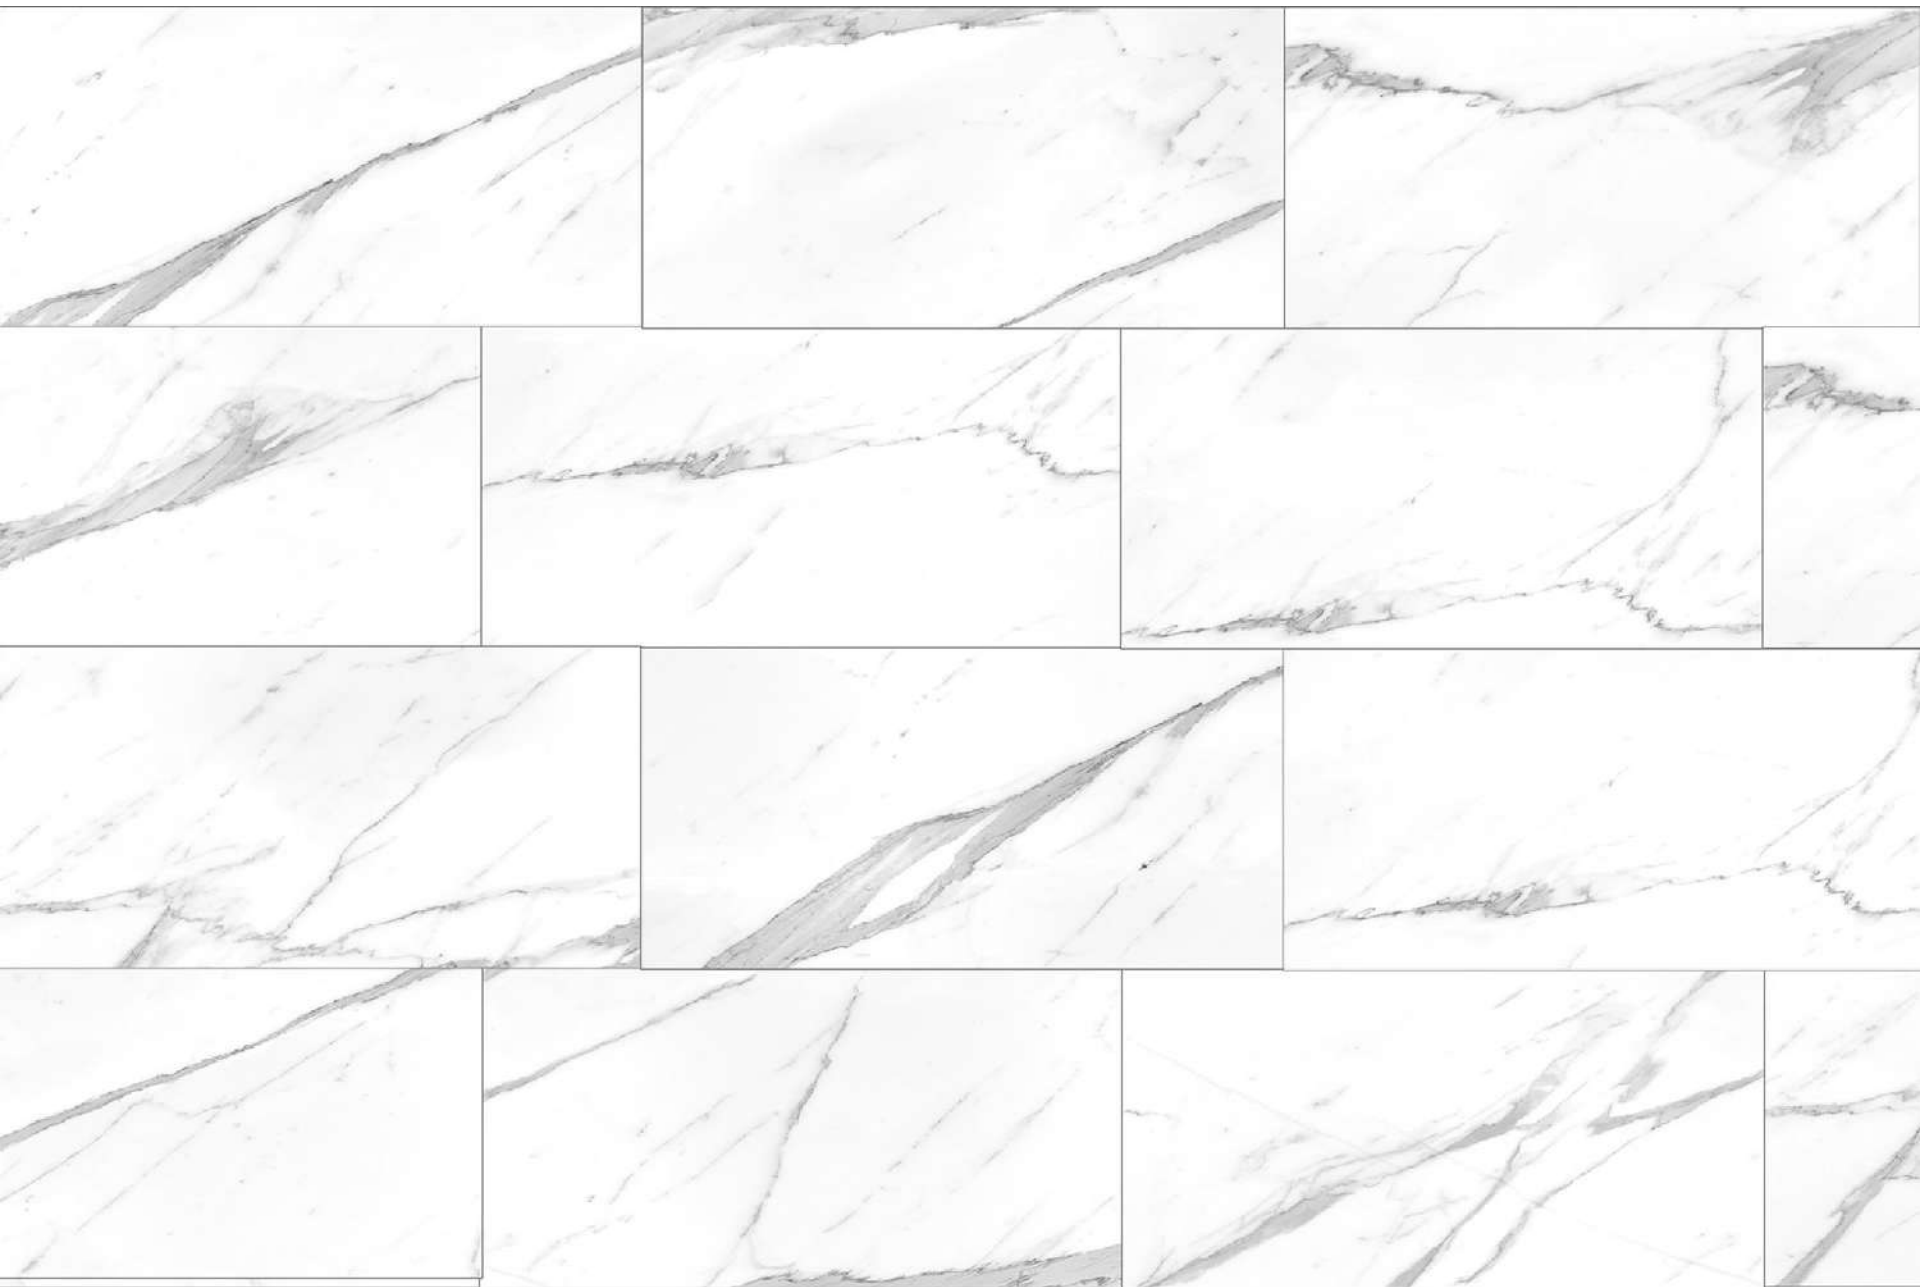



ROMAN SATVARIO (15 FACE)

BREAKING STRENGTH (D) ISO 10645-4	WATER ABSORPTION ISO 10645-3	FROST RESISTANCE ISO 10645-12	CHEMICAL RESISTANCE ISO 10645-13	STAIN RESISTANCE ISO 10645-14	USE APPLICATION	USE APPLICATION
						
> 1300 N	< 0,5 %	RESISTANT	GA, GHA (RESISTANT)	CLASS 5 (RESISTANT)	WALL	FLOOR








**TROPICAL SATVARIO (5 FACE)**

BREAKING STRENGTH (D) ISO 10645-4	WATER ABSORPTION ISO 10545-3	FROST RESISTANCE ISO 10545-12	CHEMICAL RESISTANCE ISO 10545-13	STAIN RESISTANCE ISO 10545-14	USE APPLICATION	USE APPLICATION
						
> 1300 N	< 0,5 %	RESISTANT	GLA, G1A (RESISTANT)	CLASSE5 (RESISTANT)	WALL	FLOOR

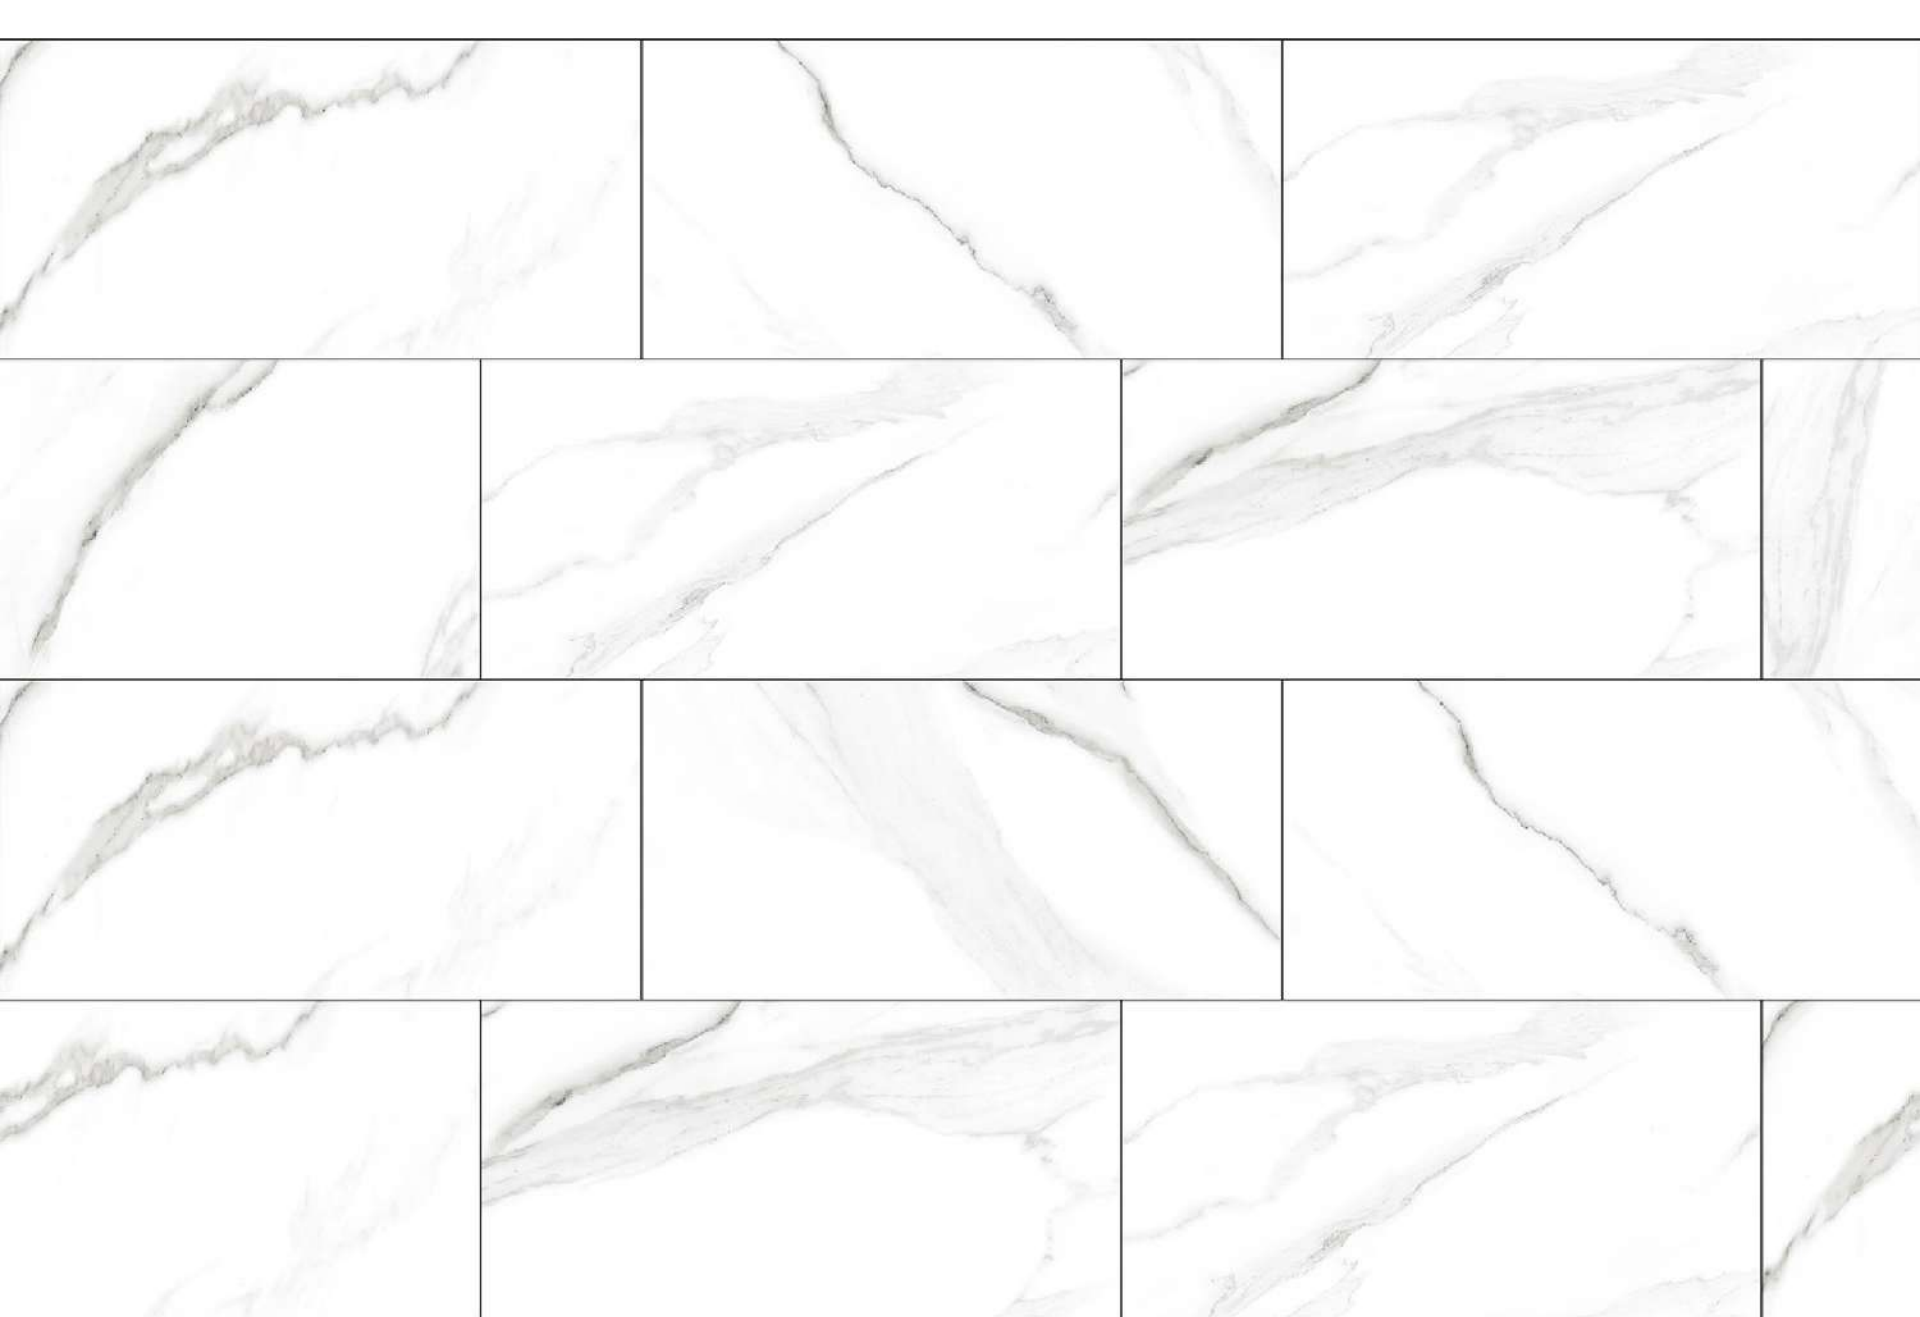

TROPICAL SATVARIO (6 FACE)